
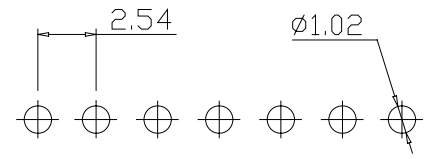


SPECIFICATION



Current Rate: 3 AMP
 Insulation Rrsistance: 1000mΩ Min
 Contact Resistance: 20mΩ Max
 Dielectric voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester, UL94v-0
 ◎Standard: Nylon 6T or P.B.T
 Contact Pin: Brass
 Finish: Tin, Gold Plated
 ◎Standard: Gold Flash all over

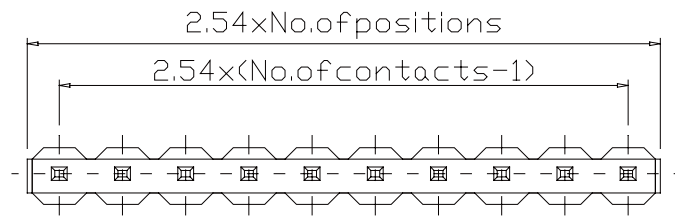

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

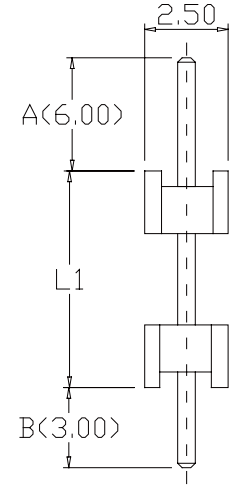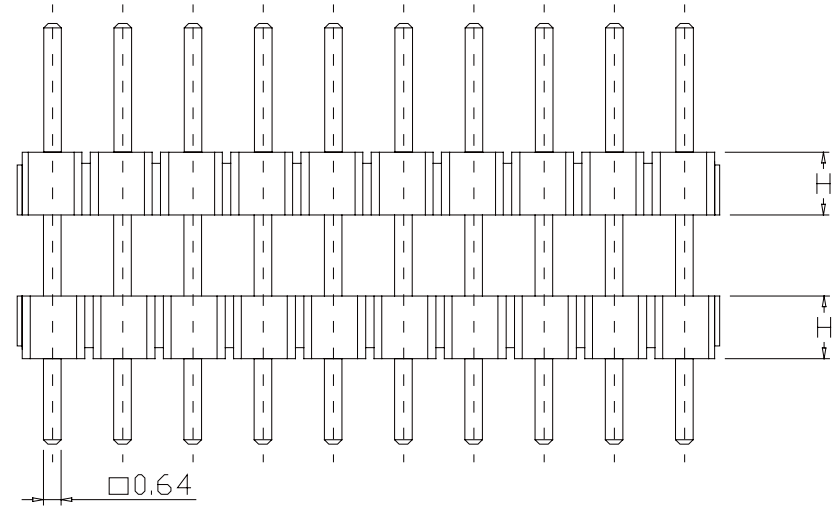

P	H	1	D	X	X	-	1	X	X	X	X	A/L1/B	-	X				
				15: Plastic Height H=1.5mm 17: Plastic Height H=1.7mm 25: Plastic Height H=2.5mm			No. of contacts per row (01-50)			G: Gold flash S: Selective GA: Gold 5u" SA: Selective 5u" GB: Gold 10u" SB: Selective 10u" GC: Gold 20u" SC: Selective 20u" GD: Gold 30u" SD: Selective 30u" T: Tin Plated TE: Tin 200u"			B: Black Insulator W: White Insulator N: Nylon Natural			L: RoHS+P.B.T U: RoHS+Nylon6T H=1.5&1.7Nylon6T		

APPRO	CHECK	DRAWN	PART NO.	PH1DXX-1XXXXA/L1/B-X	DESCRIPTION	
			ITEM NO.			
			DRAW NO.			
			UNIT	mm SCALE no		
			TOLER	NO.		