



PAGE	128	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,8,3	1.0

SPECIFICATION



Current Rate: 3 AMP
Insulation Rrsistance: 1000mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester, UL94v-0
Standard: Nylon 6T
Contact Pin: Brass
Finish: Tin, Gold Plated
Standard: Gold Flash all over

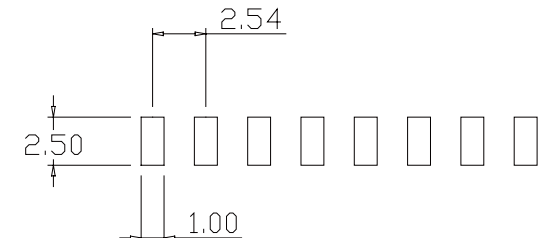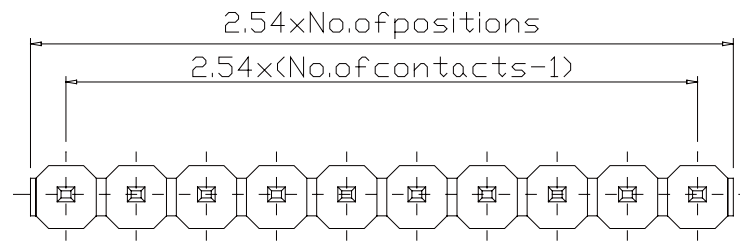

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

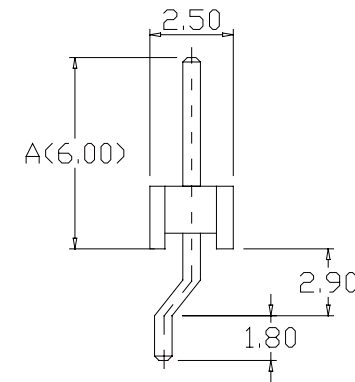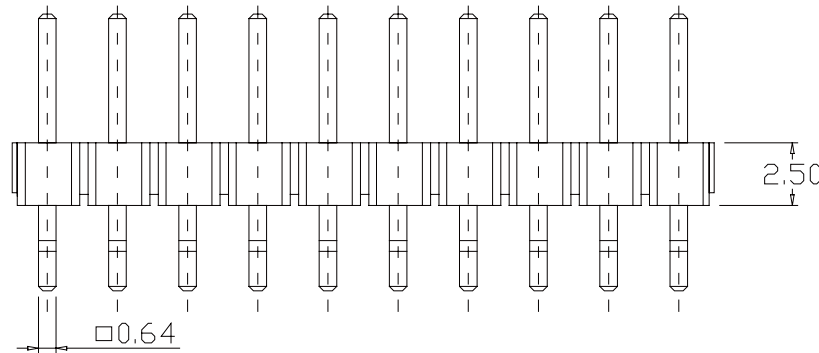

P	H	1	M	R	-	1	X	X	X	X	X	X	X	A	-	U
No. of contacts per row (02-50)							G: Gold Flash GA: Gold 5u" GB: Gold 10u" GC: Gold 20u" GD: Gold 30u" TE: Tin Plated		S: Selective SA: Selective 5u" SB: Selective 10u" SC: Selective 20u" SD: Selective 30u" TE: Tin 200u"		B: Bag Package T: Tube R: Taping & Reel		U: RoHS+Nylon 6T			

APPRO	CHECK	DRAWN	PART NO.	PH1MR-1XXXXXXXXA-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	