



PAGE	120	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,8,3	1.0

SPECIFICATION



Current Rate: 3 AMP
Insulation Rrsistance: 1000mΩMin
Contact Resistance: 20mΩMax
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester,UL94v-0
Standard: Nylon 6T
Contact Pin: Brass
Finish: Tin, Gold Plated
Standard: Gold Flash all over

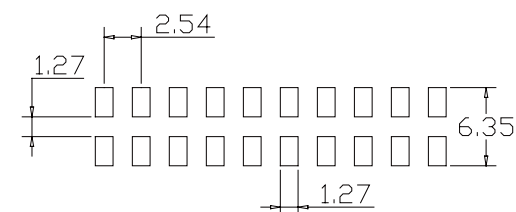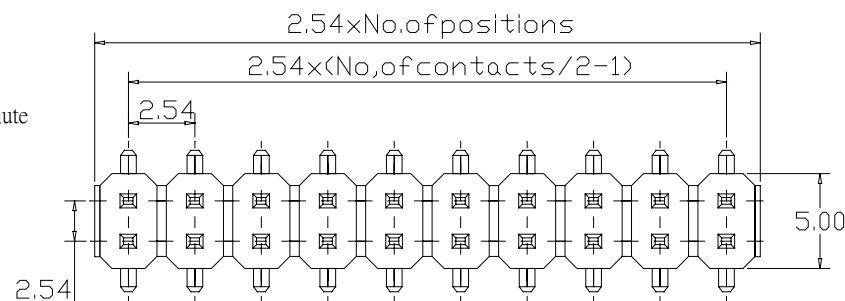

Recommended PCB Layout
(PCB TOLERANCE±0.05)

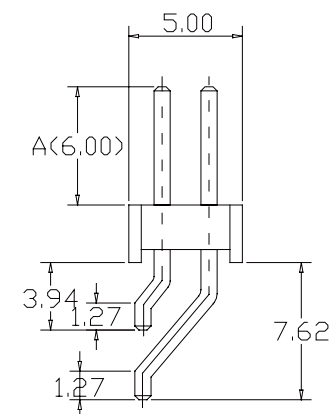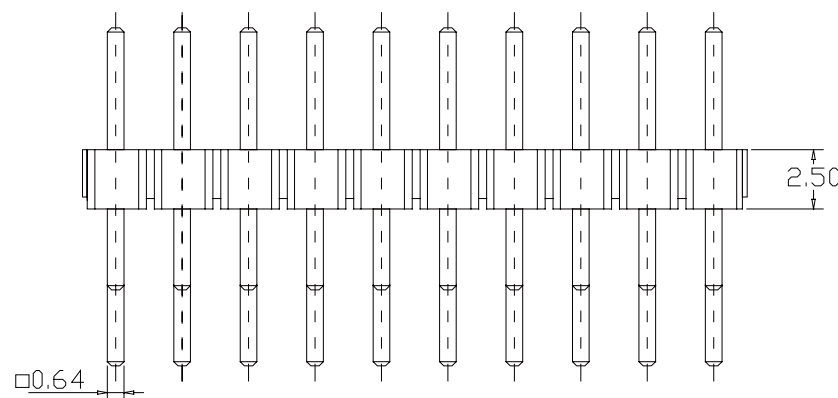

P	H	1	M	R	-	2	X	X	X	X	X	X	X	A	-	U
No.of contacts per row (02-50)							G:Gold flash		S:Selective		D:W/O Cap		B:Bag Package		U:RoHS+Nylon6T	
							GA:Gold 5u"		SA:Selective5u"		C:With Cap		TiTube			
							GB:Gold 10u"		SB:Selective10u"				R:Taping&Reel			
							GC:Gold 20u"		SC:Selective20"		Bi:Black Insulator		D:W/O Peg		Fill in DimensionFor	
							GD:Gold 30u"		SD:Selective30"		W:White Insulator		P:With Peg		Special Design	
							Ti:Tin Plated		TE:Tin200u"		N:Nylon Natural					

APPRO	CHECK	DRAWN	PART NO.	PH1MR-2XXXXXXXXA-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	