
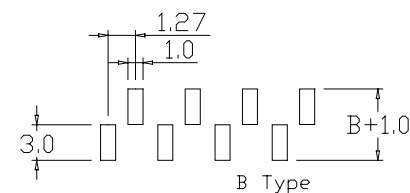
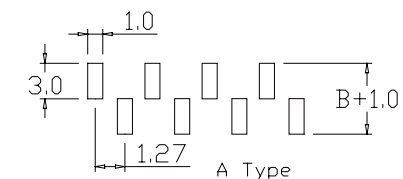

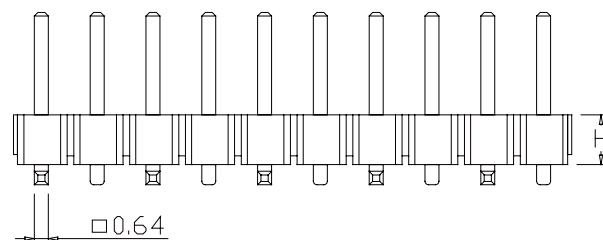
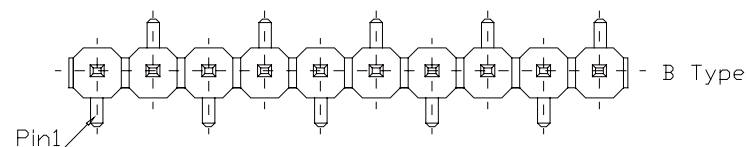


SPECIFICATION

Current Rate: 3 AMP
Insulation Resistance: 1000mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C


MATERIAL

Insulator: Polyester,UL94v-0
 ◎Standard: Nylon 6T
 Contact Pin: Brass
 Finish: Tin, Gold Plated
 ◎Standard: Gold Flash all over

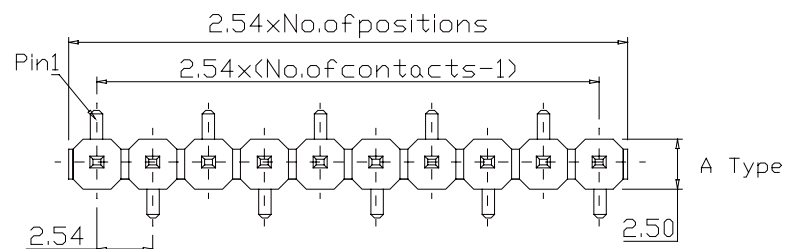

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

	Code	DimA	DimB	DimC		
				H=1.5	H=1.7	H=2.
Single row	600	6.00	5.00	2.3	2.5	3.3
	800	8.00	5.00			
Dual row	600	6.00	7.50			
	800	8.00	7.50			

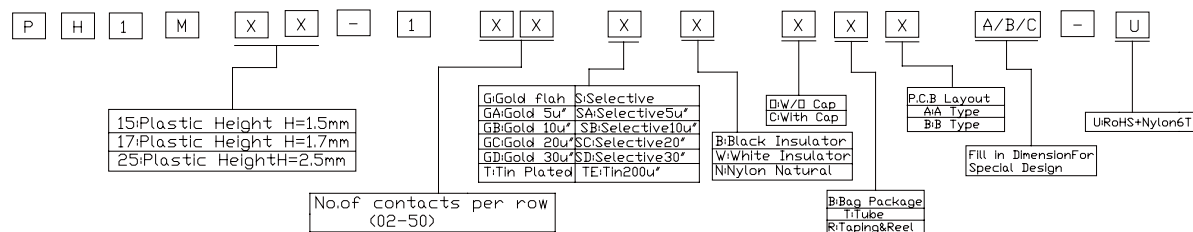

APPRO	CHECK	DRAWN	PART NO.	PH1MXX-1XXXXXXXXA/B/C-U			DESCRIPTION		
			ITEM NO.						
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com		

