




PAGE	131	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,8,3	1.0

SPECIFICATION


Current Rate: 3 AMP
Insulation Rrsistance: 1000mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL


Insulator: Polyester,UL94v-0
Standard: Nylon 6T or P.B.T
Contact Pin: Brass
Finish: Tin, Gold Plated
Standard: Gold Flash all over

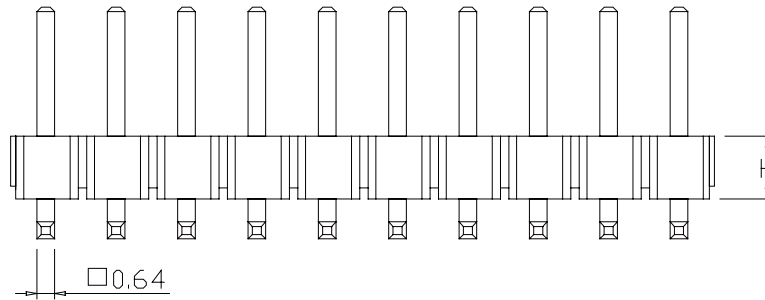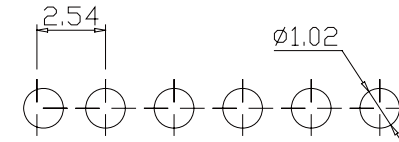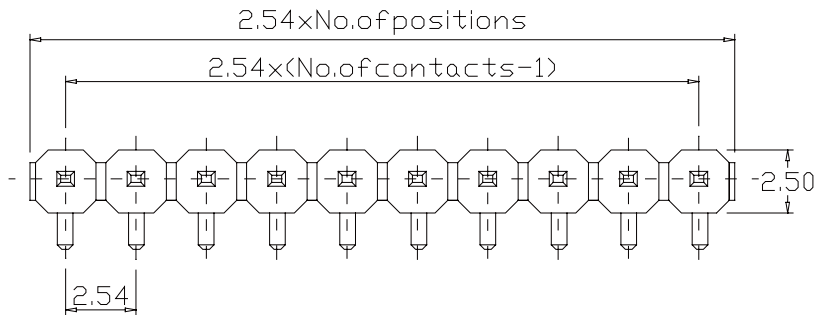

D TYPE

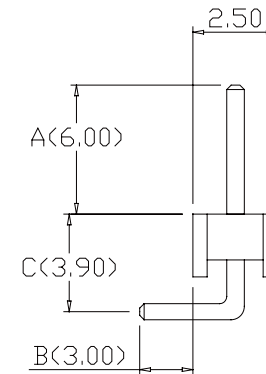

U TYPE

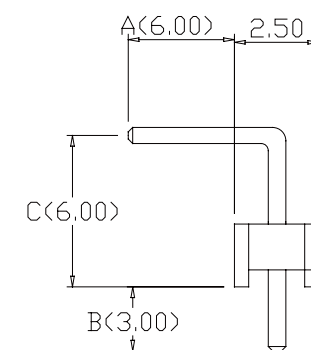

P	H	1	R	X	X	X	-	1	X	X	X	X	A/B/C	-	X
				15:Plastic Height H=1.5mm 17:Plastic Height H=1.7mm 25:Plastic HeightH=2.5mm				Gi:Gold flash Si:Selective GA:Gold 5u" SA:Selective5u" GB:Gold 10u" SB:Selective10u" GC:Gold 20u" SC:Selective20" GD:Gold 30u" SD:Selective30" T:Tin Plated TE:Tin200u"				B:Black Insulator W:White Insulator N:Nylon Natural		L:RoHS+P.B.T U:RoHS+Nylon6T H=1.5&1.7Nylon6T	
D:D Type U:U Type				No.of contacts per row (01-50)								Fill in DimensionFor Special Design			

APPRO	CHECK	DRAWN	PART NO.	PH1RXXX-1XXXXA/B/C-X	DESCRIPTION	
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	
			TOLER		NO.	
Tel:0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com						