



PAGE	124	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,8,3	1.0

SPECIFICATION



Current Rate: 3 AMP
Insulation Rrsistance: 1000mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester, UL94v-0
Standard: Nylon 6T or P.B.T
Contact Pin: Brass
Finish: Tin, Gold Plated
Standard: Gold Flash all over

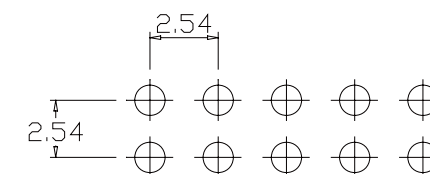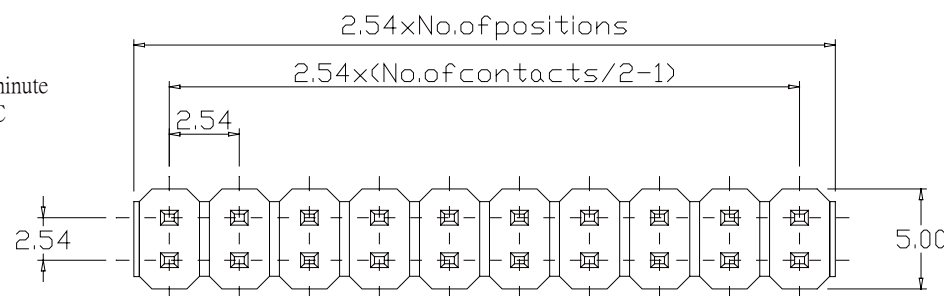

Recommended PCB Layout
(PCB TOLERANCE±0.05)

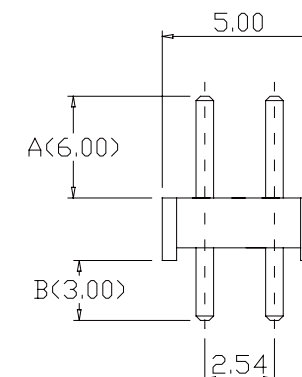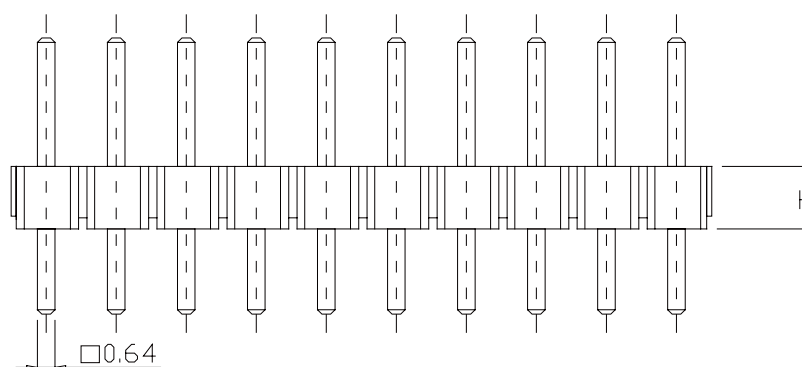

P	H	1	S	X	X	-	2	X	X	X	X	A/B	-	X			
				15:Plastic Height H=1.5mm 17:Plastic HeightH=1.7mm 25:Plastic HeightH=2.5mm				G:Gold flash S:Selective GA:Gold 5u" SA:Selective5u" GB:Gold 10u" SB:Selective10u" GC:Gold 20u" SC:Selective20" GD:Gold 30u" SD:Selective30" TI:Tin Plated TE:Tin200u"				B:Black Insulator W:White Insulator N:Nylon Natural		Fill in DimensionFor Special Design		L:RoHS+P.B.T U:RoHS+Nylon6T H=1.5&1.7Nylon 6T	

No.of contacts per row
(01-50)

APPRO	CHECK	DRAWN	PART NO.	PH1SXX-2XXXXA/B-X			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	