



PAGE	126	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,8,3	1.0

SPECIFICATION





Current Rate: 3 AMP
Insulation Rrsistance: 1000mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester, UL94v-0
Standard: Nylon 6T or P.B.T
Contact Pin: Brass
Finish: Tin, Gold Plated
Standard: Gold Flash all over

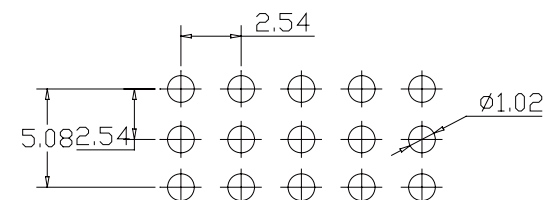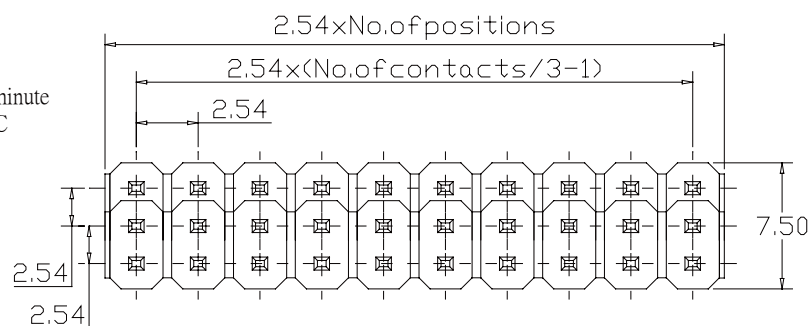

Recommended PCB Layout
(PCB TOLERANCE±0.05)

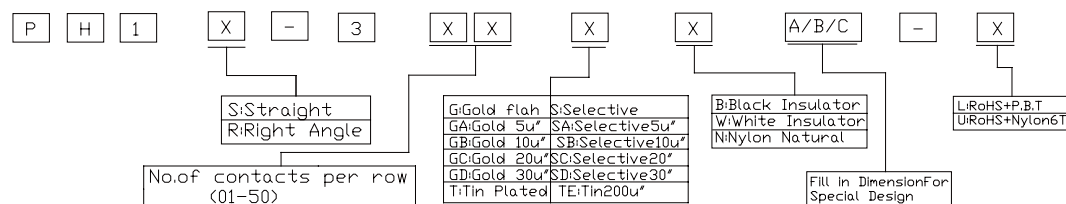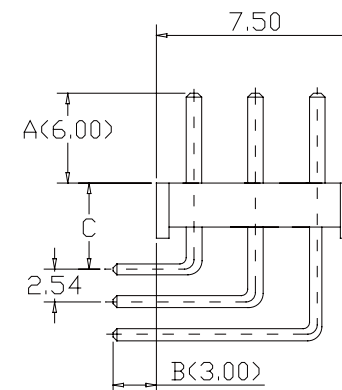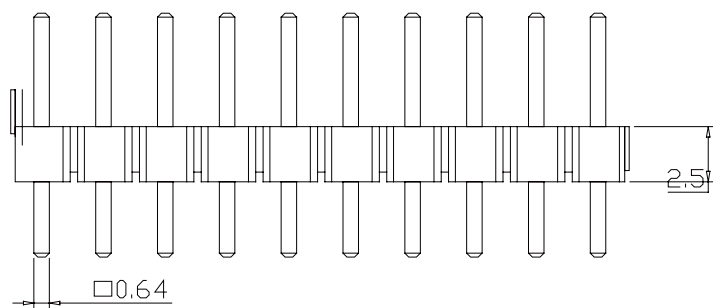

APPRO	CHECK	DRAWN	PART NO.	PH1X-3XXXXA/B/C-X	DESCRIPTION	
			ITEM NO.			
			DRAW NO.			
			UNIT	mm SCALE no		
			TOLER	NO.		

Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com