

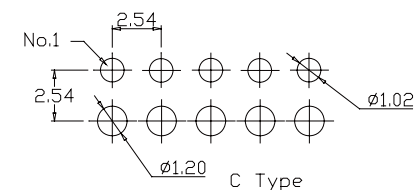
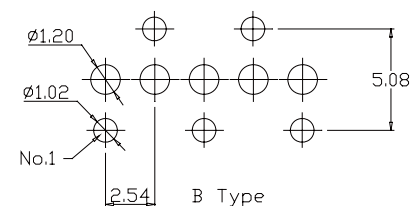
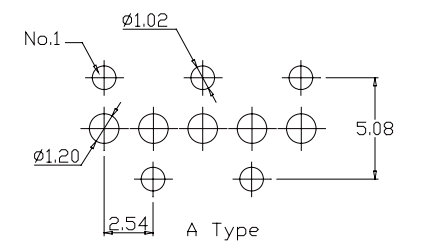
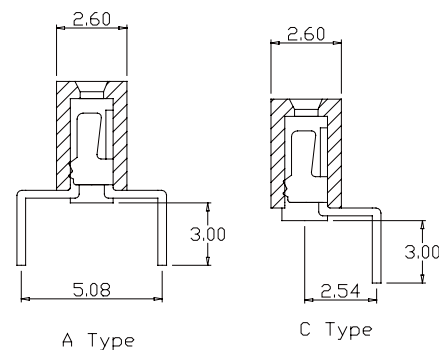
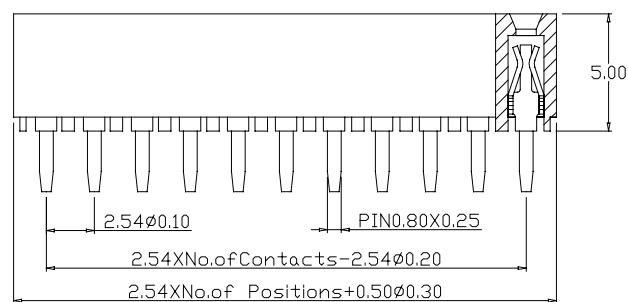
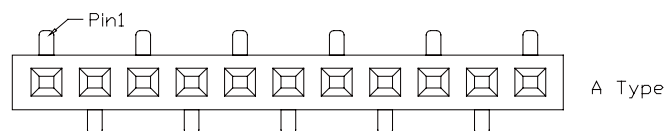


Current Rate: 3 AMP
Insulation Resistance: 1000mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

Insulator: Polyester,UL94v-0
 Standard: P.B.T or Nylon 6T
 Contact Pin: Phospor Bronze
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

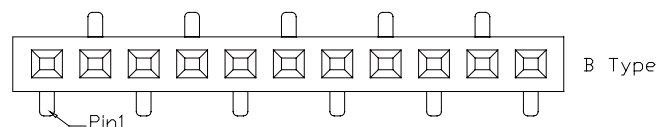

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

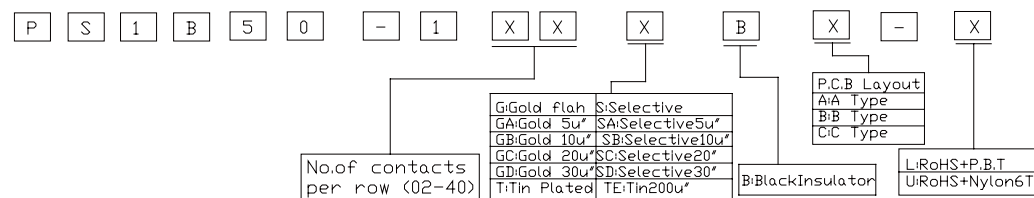

APPRO	CHECK	DRAWN	PART NO.	PS1B50-1XXXXBX-X			DESCRIPTION		
			ITEM NO.						Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO.				