

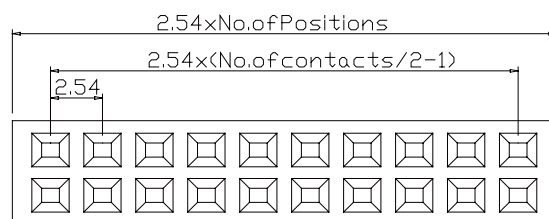






Current Rate: 3 AMP
Insulation Resistance: 1000m Ω Min
Contact Resistance: 20m Ω Max
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

Insulator: Polyester,UL94v-0
 ◎Standard: P.B.T or Nylon 6T
 Contact Pin: Brass
 Finish: Tin, Gold Plated
 ◎Standard: Gold Flash all over

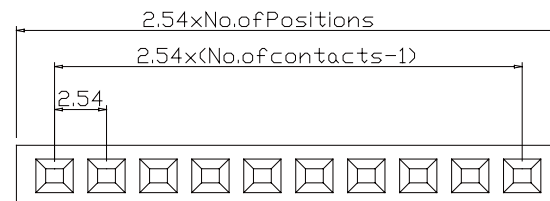

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

	DimA	DimB
1A	11.05	2.50
1B	11.05	7.35
1C	11.05	12.2
2A	13.59	4.85
2B	13.59	9.65
3A	16.13	2.30
3B	16.13	7.10
4A	18.67	4.60

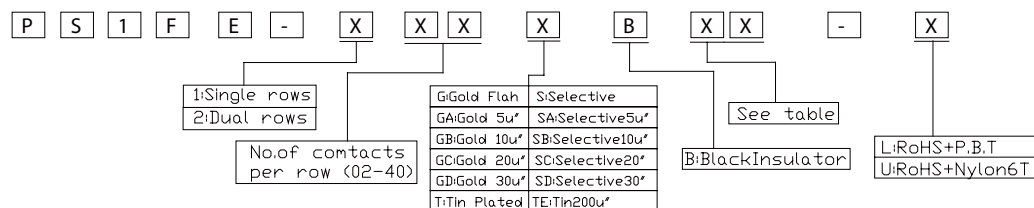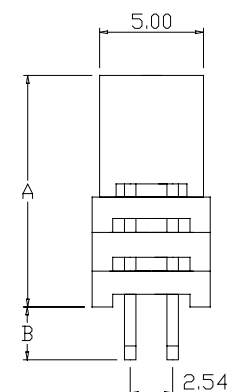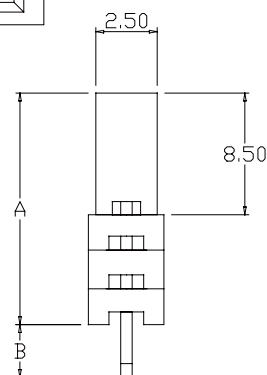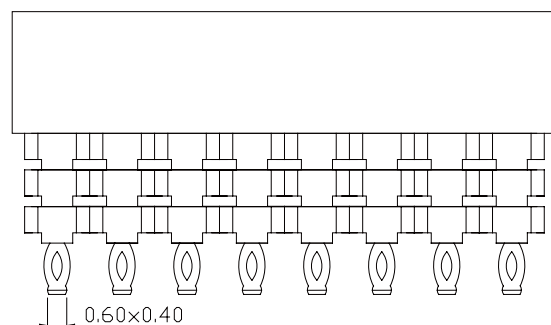

APPRO	CHECK	DRAWN	PART NO.	PS1FE-XXXXBXX-X			DESCRIPTION		
			ITEM NO.						
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO.				
				Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com					