
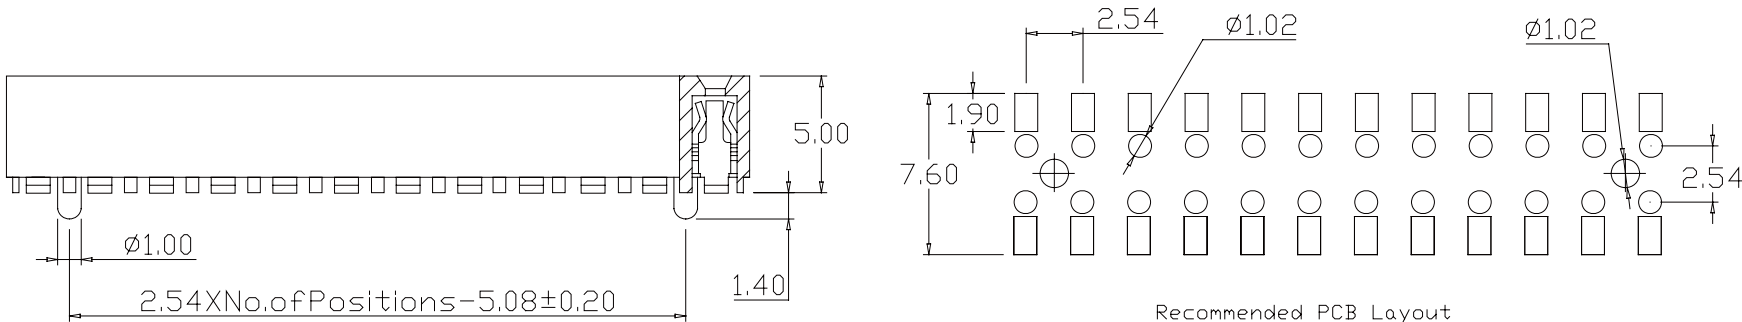



PAGE	146	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,8,4	1.0

SPECIFICATION
 Current Rate: 3 AMP
 Insulation Rrsistance: 1000mΩMin
 Contact Resistance: 20mΩMax
 Dielectric voltage: 1000V AC for one minute
 Operation Temperature: -40°Cto +105°C

MATERIAL
 Insulator: Polyester,UL94v-0
 Standard: Nylon 6T
 Contact Pin: Phospor Bronze
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

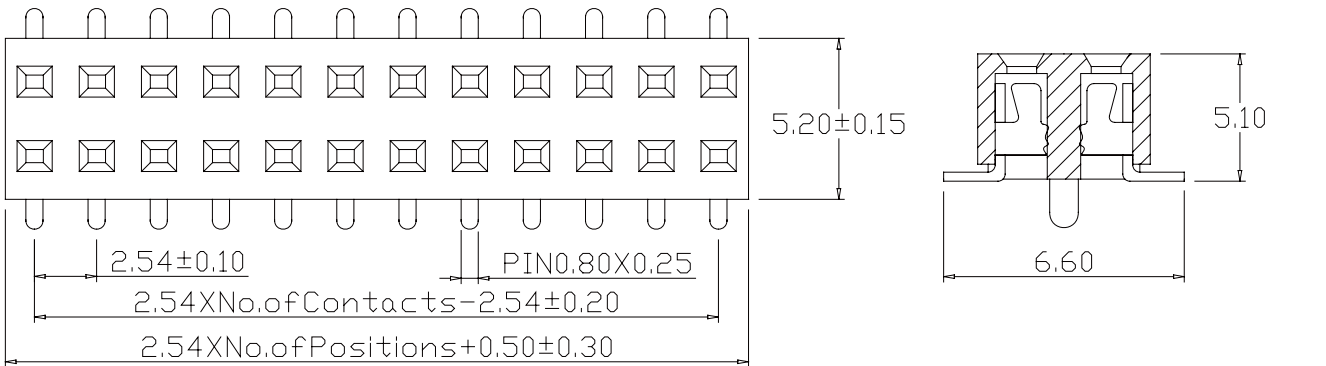

Recommended PCB Layout
 (PCB TOLERANCE±0.05)

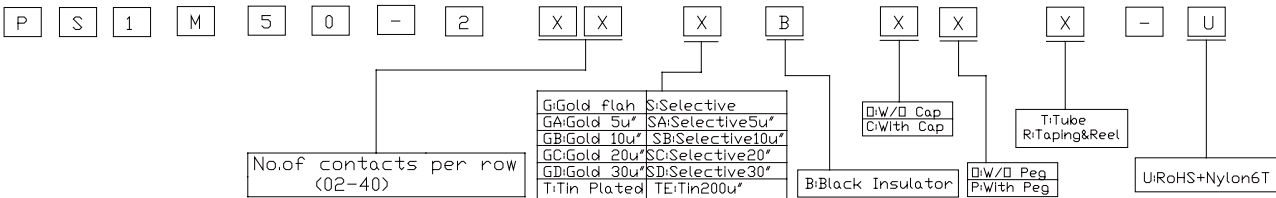

APPRO	CHECK		PS1M50-2XXXXBXXX-U			
		DRAW NO.	mm	SCALE	no	
		UNIT		NO.		
		TOLER				Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com