



PAGE	152	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,8,4	1.0

SPECIFICATION




Current Rate: 3 AMP
Insulation Rrsistance: 1000mΩMin
Contact Resistance: 20mΩMax
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -40℃to +105℃

MATERIAL

Insulator: Polyester,UL94v-0
◎Standard: Nylon 6T
Contact Pin: Phospor Bronze
Finish: Tin, Gold Plated
◎Standard: Gold Flash all over

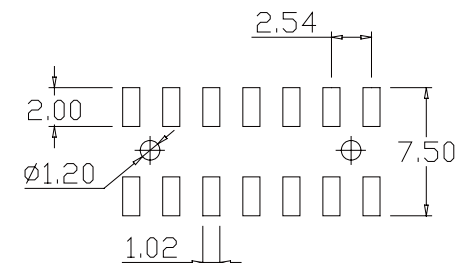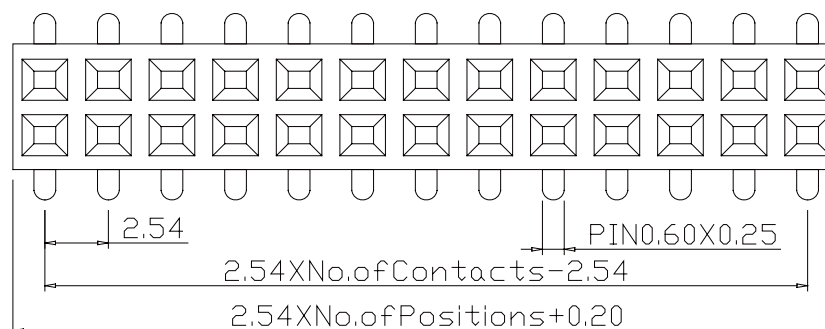

Recommended PCB Layout
(PCB TOLERANCE±0.05)

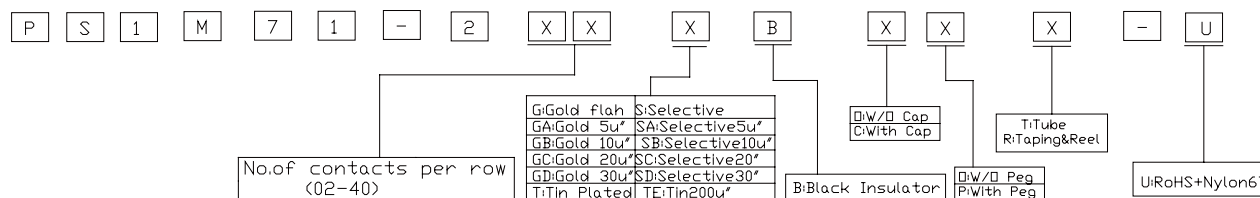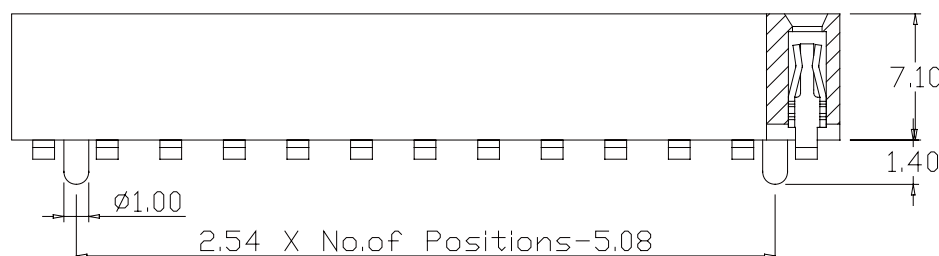

APPRO	CHECK	DRAWN	PART NO.	PS1M71-2XXXXBXXX-U			DESCRIPTION		
			ITEM NO.						
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO		Tel: 0769 22020068	Fax: 0769 22020069	E-mail: sales@vigortec.com