






PAGE	150	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,8,4	1.0

SPECIFICATION



Current Rate: 3 AMP
Insulation Rrsistance: 1000m Ω Min
Contact Resistance: 20m Ω Max
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester, UL94v-0
Standard: P.B.T or Nylon 6T
Contact Pin: Phospor Bronze
Finish: Tin, Gold Plated
Standard: Gold Flash all over

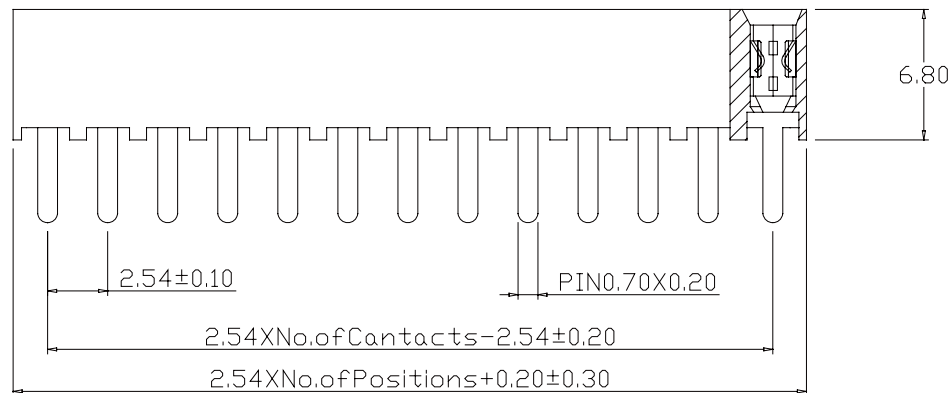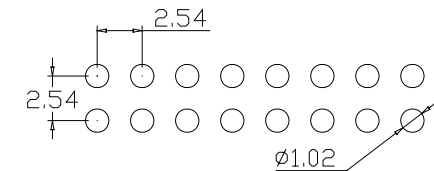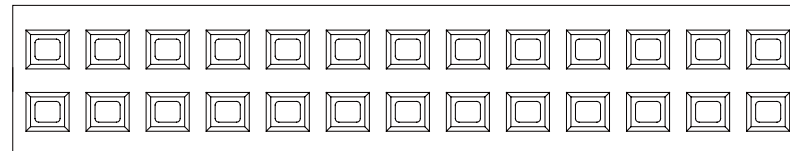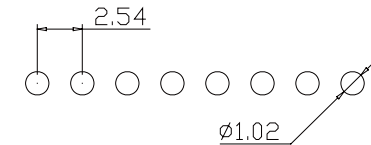

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)



P	S	1	S	6	8	-	X	X	X	B	-	X		
							1:Single rows 2:Dual rows		G:Gold flash S:Selective GA:Gold 5u" SA:Selective5u" GB:Gold 10u" SB:Selective10u" GC:Gold 20u" SC:Selective20u" GD:Gold 30u" SD:Selective30u" Ti:Tin Plated TE:Tin200u"		B:BlackInsulator		Li:RoHS+P.B.T U:RoHS+Nylon6T	
							No.of contacts per row (02-40)							

APPRO	CHECK	DRAWN	PART NO.	PS1S68-XXXXB-X			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	