

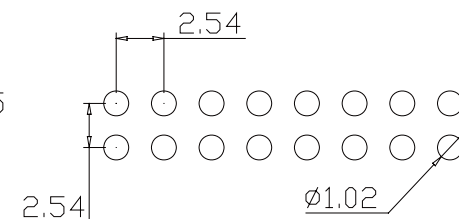
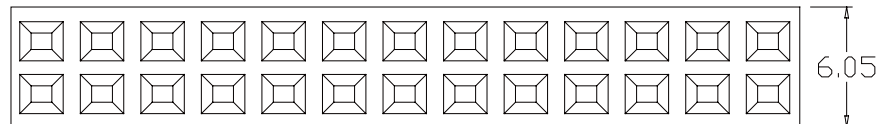


Current Rate: 3 AMP
Insulation Resistance: 1000mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

Insulator: Polyester, UL94v-0
 Standard: P.B.T or Nylon 6T
 Contact Pin: Phospor Bronze
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over




Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

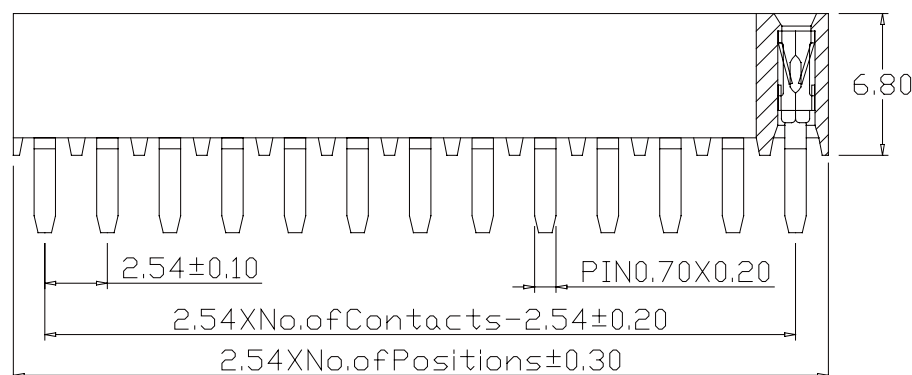

P S 1 S 6 8 A - 2 X X X B - X

No. of contacts per row (02-40)	Gi:Gold flah	Si:Selective	B:BlackInsulator	Li:RoHS+P.B.T U:RoHS+Nylon6T
	GA:Gold 5u"	SA:Selective5u"		
	GB:Gold 10u"	SB:Selective10u"		
	GC:Gold 20u"	SC:Selective20"		
	GD:Gold 30u"	SD:Selective30"		
	Ti:Tin Plated	TE:Tin200u"		

APPRO	CHECK	DRAWN	PART NO.	PS1S68A-2XXXB-X			DESCRIPTION		
			ITEM NO.						
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO.				
				Tel: 0769 22020068 Fax: 0769 22020069			E-mail: sales@vigortec.com		