
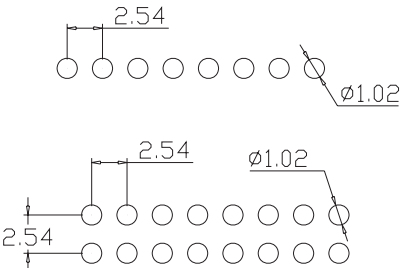






PAGE	153	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,8,4	1.0

SPECIFICATION
 Current Rate: 3 AMP
 Insulation Rrsistance: 1000mΩMin
 Contact Resistance: 20mΩMax
 Dielectric voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C

MATERIAL
 Insulator: Polyester,UL94v-0
 Standard: P.B.T or Nylon 6T
 Contact Pin: Phospor Bronze
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over



Recommended PCB Layout
 (PCB TOLERANCE±0.05)

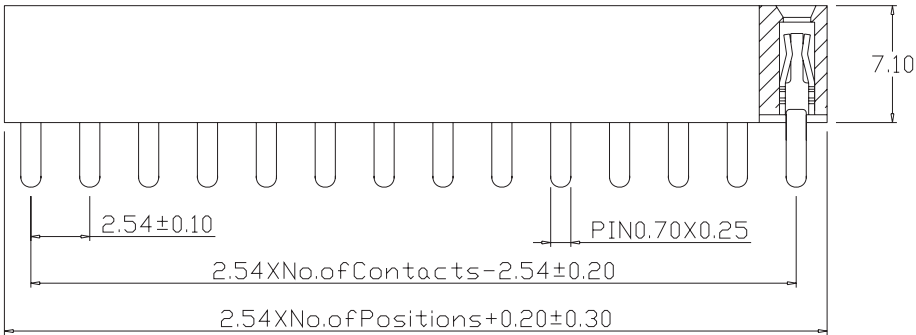

P

S

1

S

7

1

-

X

X

X

B

-

X

1:Single rows

2:Dual rows

No.of contacts per row (02-40)

G:Gold flash

GA:Gold 5u"

GB:Gold 10u"

GC:Gold 20u"

GD:Gold 30u"

T:Tin Plated

S:Selective

SA:Selective5u"

SB:Selective10u"

SC:Selective20u"

SD:Selective30u"

TE:Tin200u"

B:BlackInsulator

Li:RoHS+P.B.T

U:RoHS+Nylon6T

APPRO	CHECK	DRAWN	PART NO.	PS1S71-XXXXB-X			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel:0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	