



PAGE	155	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,8,5	1.0

SPECIFICATION




Current Rate: 3 AMP
Insulation Rrsistance: 1000mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester,UL94v-0
Standard: Nylon 6T
Contact Pin: Phospor Bronze
Finish: Tin, Gold Plated
Standard: Gold Flash all over

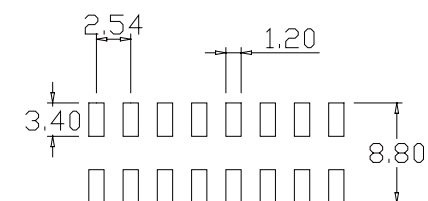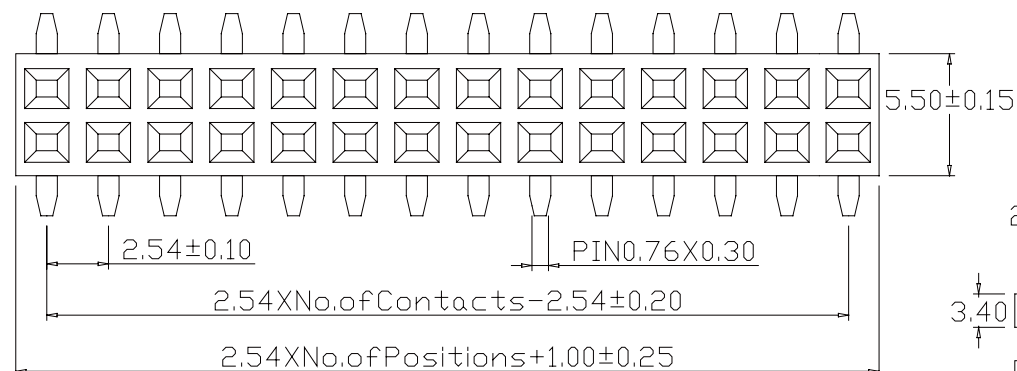

Recommended PCB Layout
(PCB TOLERANCE±0.05)

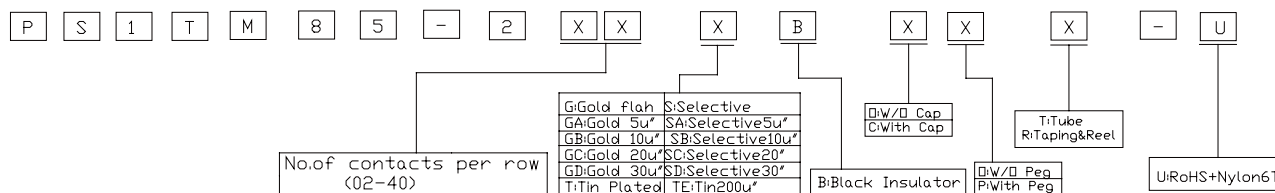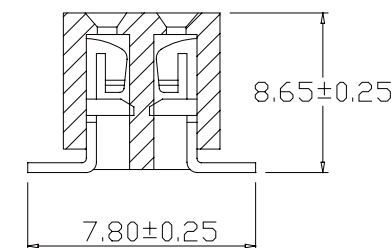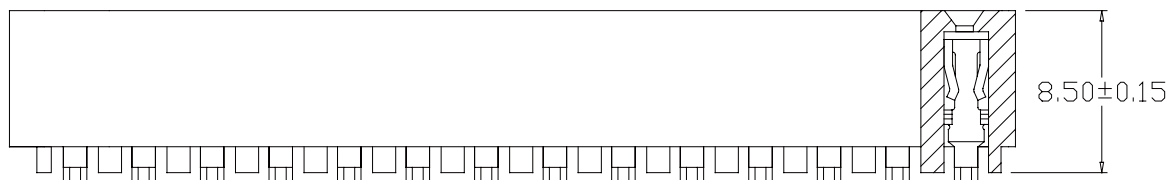

No.of contacts per row
(02-40)

G:Gold flash S:Selective
GA:Gold 5u" SA:Selective5u"
GB:Gold 10u" SB:Selective10u"
GC:Gold 20u" SC:Selective20"
GD:Gold 30u" SD:Selective30"
TI:Tin Plated TE:Tin200u"

W/ Cap
C:With Cap

T:Tube
R:Taping&Reel

B:Black Insulator

W/ Peg
P:With Peg

U:RoHS+Nylon6T

APPRO	CHECK	DRAWN	PART NO.	PS1TM85-2XXXXBXXX-U	DESCRIPTION	
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE no	
			TOLER		NO.	

Tel:0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com