







PAGE	158	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,8,5	1.0

SPECIFICATION


Current Rate: 3 AMP
Insulation Rrsistance: 1000mΩMin
Contact Resistance: 20mΩMax
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester, UL94v-0
Standard: P.B.T or Nylon 6T
Contact Pin: Brass
Finish: Tin, Gold Plated
Standard: Gold Flash all over

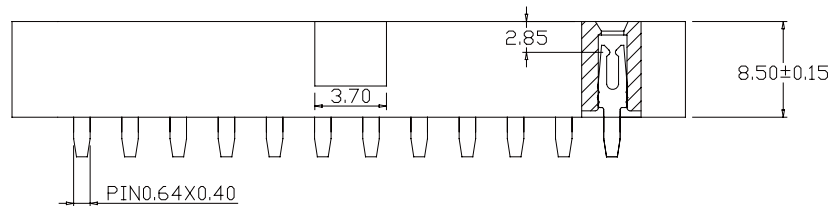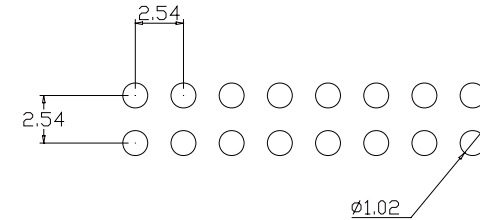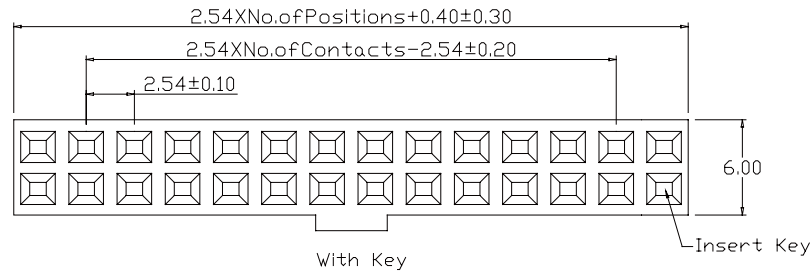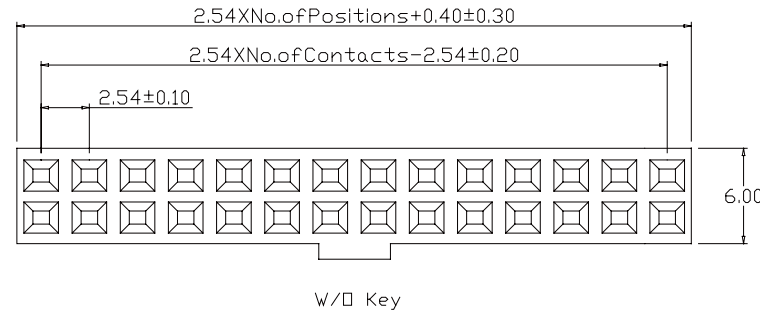

Recommended PCB Layout
(PCB TOLERANCE±0.05)

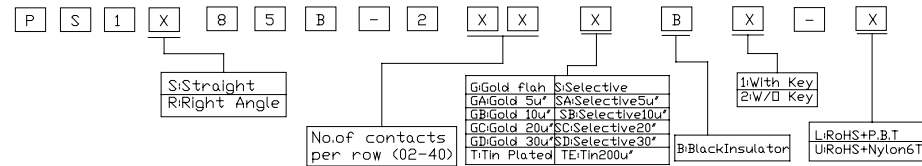

APPRO	CHECK	DRAWN	PART NO.	PS1X85B-2XXXXB-X	DESCRIPTION	
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE no	
			TOLER		NO.	

Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com