


Current Rate: 3 AMP
Insulation Rsrstence: 1000mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -40℃ to +105℃

Insulator: Polyester, UL94v-0
 Standard: P.B.T or Nylon 6T
 Contact Pin: Brass
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

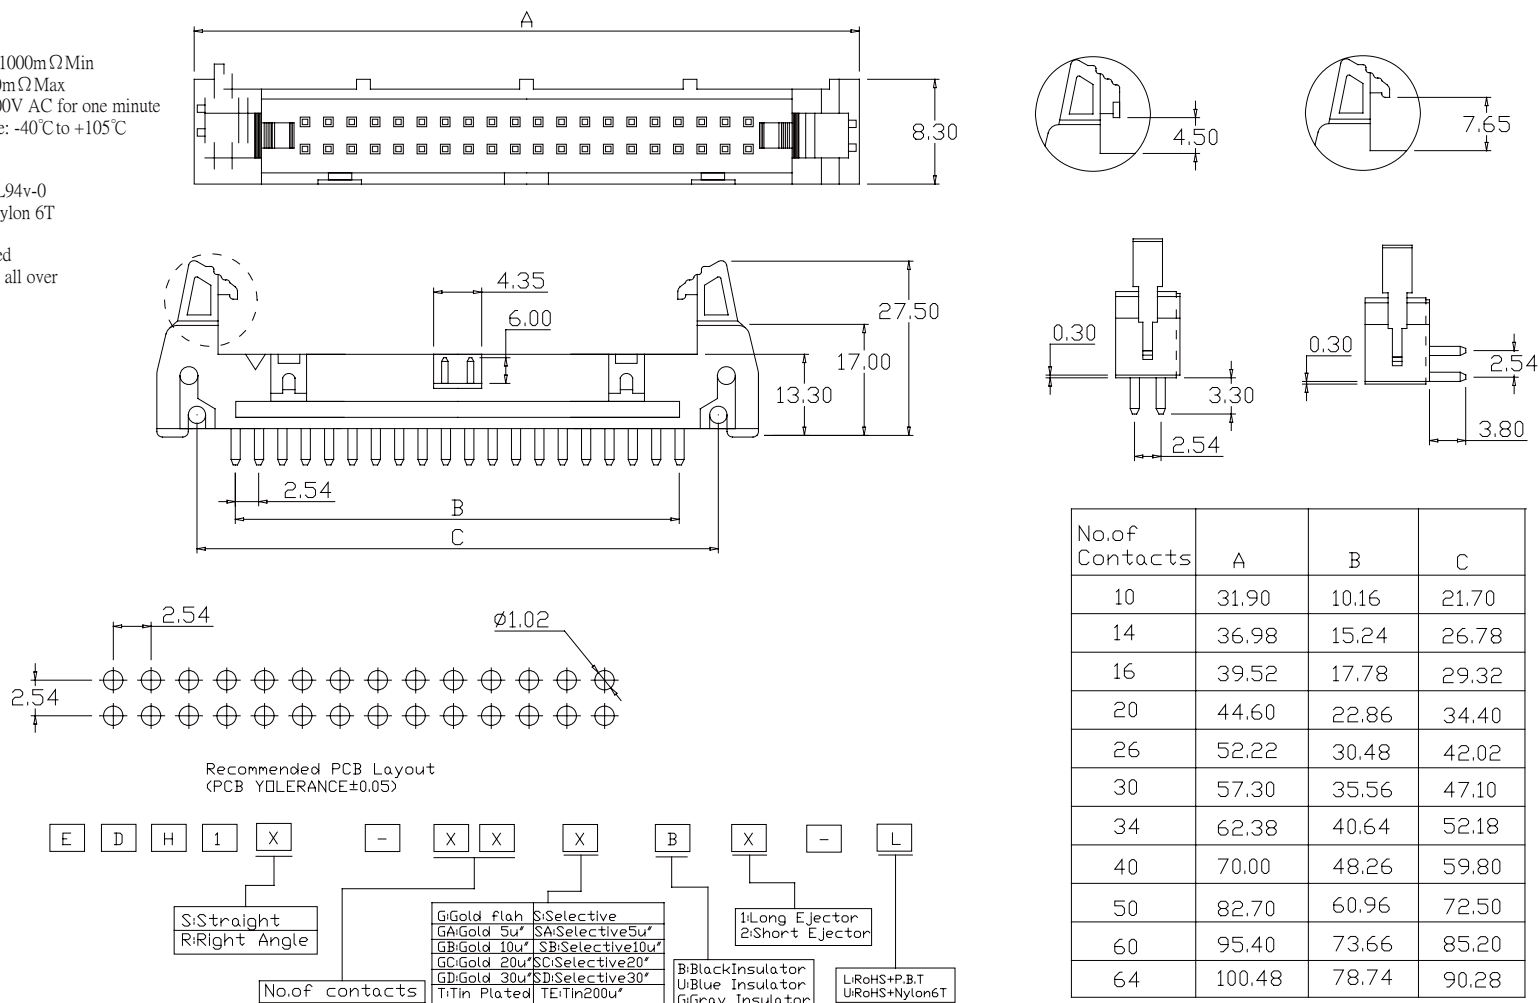

No.of Contacts	A	B	C
10	31.90	10.16	21.70
14	36.98	15.24	26.78
16	39.52	17.78	29.32
20	44.60	22.86	34.40
26	52.22	30.48	42.02
30	57.30	35.56	47.10
34	62.38	40.64	52.18
40	70.00	48.26	59.80
50	82.70	60.96	72.50
60	95.40	73.66	85.20
64	100.48	78.74	90.28

APPRO	CHECK	DRAWN	PART NO.	EDH1X-XXXBX-X			DESCRIPTION		
			ITEM NO.						
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO.				
				Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com					