



PAGE	174	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,8,6	1.0

SPECIFICATION

Current Rate: 3 AMP
Insulation Resistance: 1000mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester, UL94v-0
Standard: P.B.T
Contact Pin: Phospor Bronze or Brass
Finish: Tin, Gold Plated
Standard: Gold Flash all over

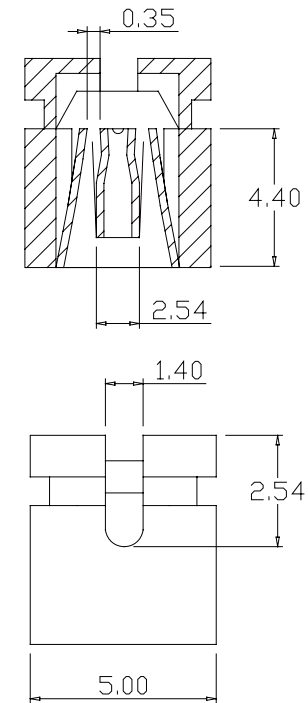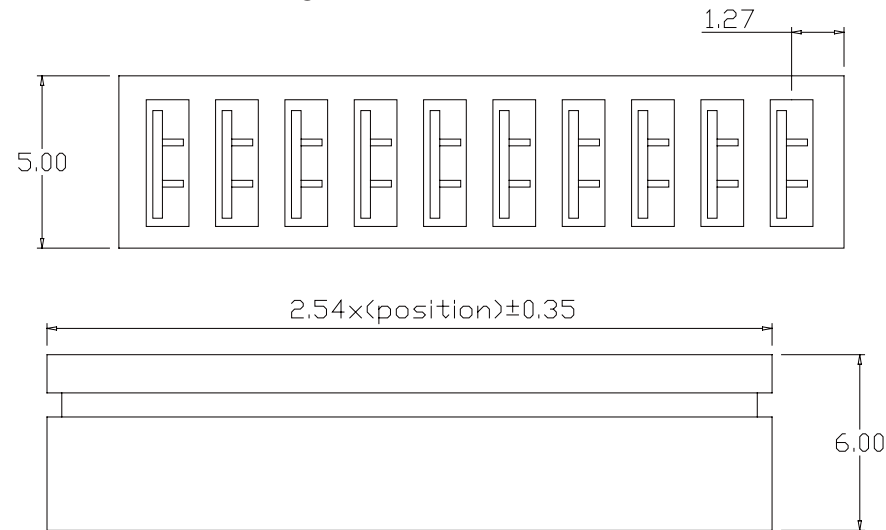

M	J	1	X	-	E	X	X	X	B	-	L
			B:Brass P:Phospor Bronze		No.of contacts(02-10)		G:Gold flash S:Selective GA:Gold 5u" SA:Selective5u" GB:Gold 10u" SB:Selective10u" GC:Gold 20u" SC:Selective20" GD:Gold 30u" SD:Selective30" TE:Tin200u"		B:Black Insulator		U:RoHS+P.B.T

APPRO	CHECK	DRAWN	PART NO.	MJ1X-EXXXB-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	