

SPECIFICATION

Current Rate: 3 AMP

Insulation Resistance: 1000mΩ Min

Contact Resistance: 20mΩ Max

Dielectric voltage: 1000V AC for one minute

Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester,UL94v-0


© Standard: P.B.T

Contact Pin: Phospor Bronze or Brass


Finish: Tin, Gold Plated

©Standard: Gold Flash all over


A Type




B Type




C Type




D Type

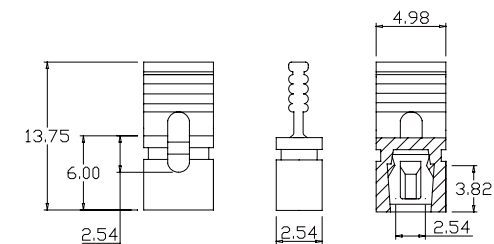


0.35




0,35





G Type

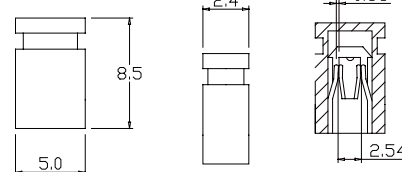


H Type

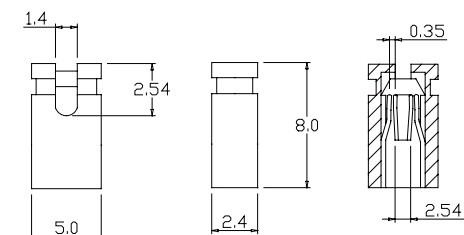

F Type

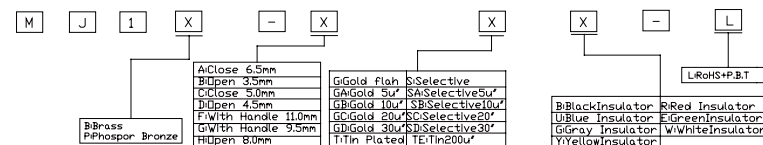

APPRO	CHECK	DRAWN	PART NO.	MJ1X-XXX-L			DESCRIPTION		
			ITEM NO.						Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO.				