

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000mΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin-plated




Material: Nylon 66, UL94V-2

Pantone Color: 7506C

PartNo.: 2542 □ -XXTW -L

R Rightangle
R0 0 pposite angle

PART NO.	Dimensions	
	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80

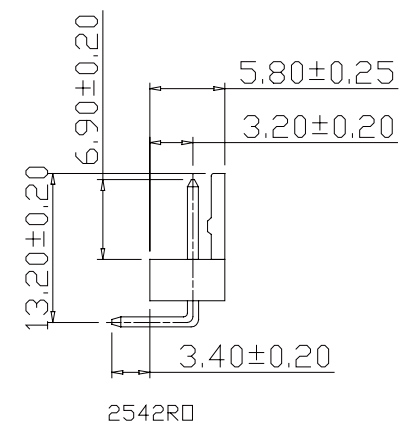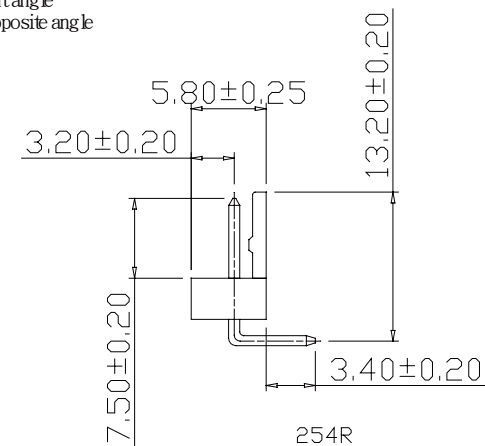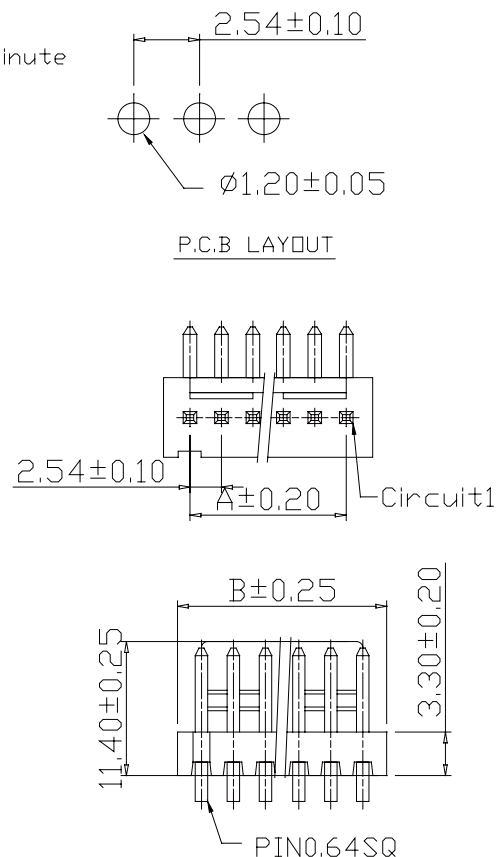

APPRO

CHECK

DRAWN

PART NO.

Part No.:2542-XXTW-L

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

DESCRIPTION



Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com