



PAGE		314		BY		CHK		REVISION RECORD MODIFICATIONS		DATE		REV.	
				ALLEN				RELEASE TO PRODUCTION		2007,9,4		1.0	

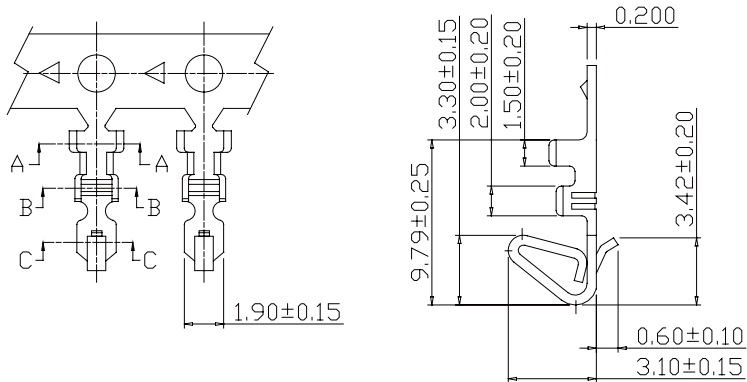

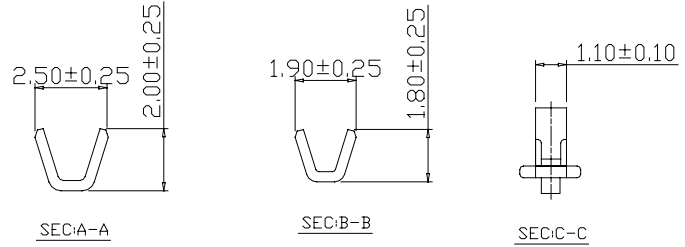

Part No	Wire Range	Insulation O.D	Material	Finish	Qty/reel
2542-TTB-L	AWG#24-#30	1.57mm(max)	Brass	Tin-Plated	10,000pcs
2542-TGB-L	AWG#24-#30	1.57mm(max)	Brass	Gold-Flash	
2542-TTP-L	AWG#24-#30	1.57mm(max)	Phosphor Bronze	Tin-Plated	

PartNo.:2542-T-L

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25℃ ~ +85℃

Contact Resistance: 10mΩ Max


Insulation Resistance: 1000mΩ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66, UL94V-2

Pantone Color: 7506C

PART NO.	Dimensions	
	A	B
2542H-02W-L	2.54	5.68
2542H-03W-L	5.08	8.22
2542H-04W-L	7.62	10.76
2542H-05W-L	10.16	13.30
2542H-06W-L	12.70	15.84
2542H-07W-L	15.24	18.38
2542H-08W-L	17.78	20.92
2542H-09W-L	20.32	23.46
2542H-10W-L	22.86	26.00
2542H-11W-L	25.40	28.54
2542H-12W-L	27.94	31.08
2542H-13W-L	30.48	33.62
2542H-14W-L	33.02	36.16
2542H-15W-L	35.56	38.70
2542H-16W-L	38.10	41.24
2542H-17W-L	40.64	43.78
2542H-18W-L	43.18	46.32
2542H-19W-L	45.72	48.86
2542H-20W-L	48.26	51.40

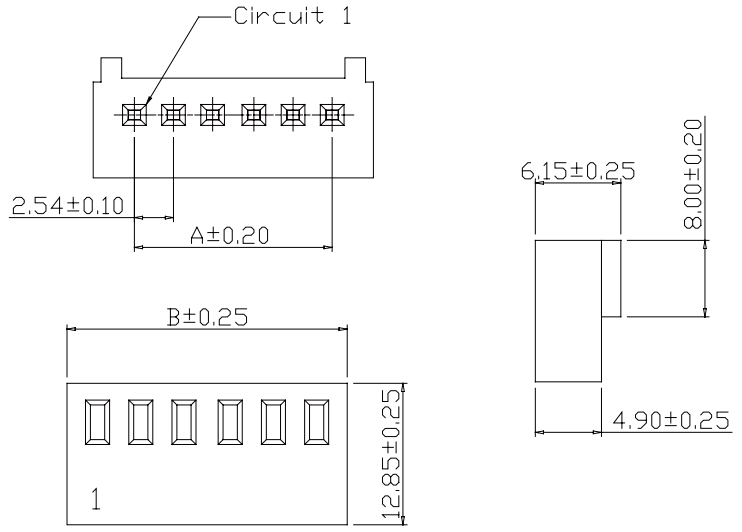

PartNo.:2542H-XXW-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2542H-XXW-L				DESCRIPTION	
			ITEM NO.						
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO.		Tel:0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com		