



PAGE	316	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,4	1.0

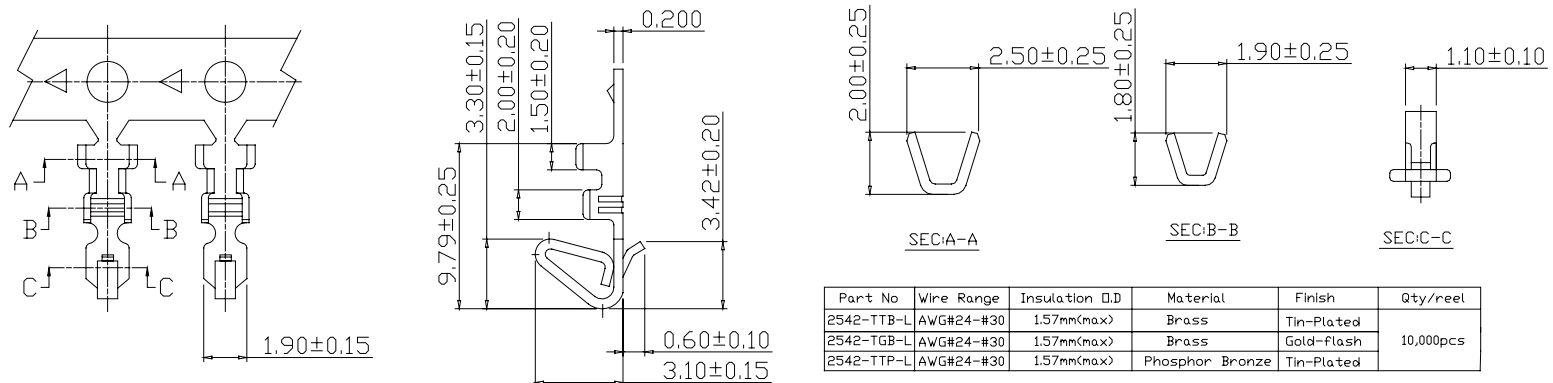

PartNo.: 2542-T-L

SPECIFICATIONS
 Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000mΩ Min
 Withstanding Voltage: 1000V AC/minute
 Material: Nylon 66, UL94V-2
 Pantone Color: 1685C

PART NO.	Dimensions	
	A	B
2544H-02R-L	2.54	5.68
2544H-03R-L	5.08	8.22
2544H-04R-L	7.62	10.76
2544H-05R-L	10.16	13.30
2544H-06R-L	12.70	15.84
2544H-07R-L	15.24	18.38
2544H-08R-L	17.78	20.92
2544H-09R-L	20.32	23.46
2544H-10R-L	22.86	26.00
2544H-11R-L	25.40	28.54
2544H-12R-L	27.94	31.08
2544H-13R-L	30.48	33.62
2544H-14R-L	33.02	36.16
2544H-15R-L	35.56	38.70
2544H-16R-L	38.10	41.24
2544H-17R-L	40.64	43.78
2544H-18R-L	43.18	46.32
2544H-19R-L	45.72	48.86
2544H-20R-L	48.26	51.40

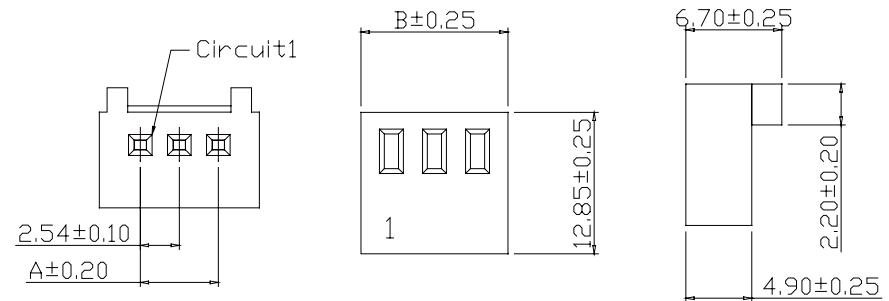

Part No. : 2544H-XXR-L

APPRO	CHECK	DRAWN	PART NO.	Part No. : 2544H-XXR-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	