


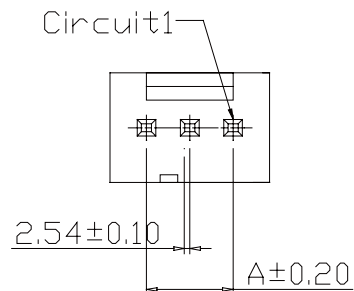


SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000mΩ Min
 Withstanding Voltage: 1000V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66, UL94V-2
 Pantone Color: 1685C

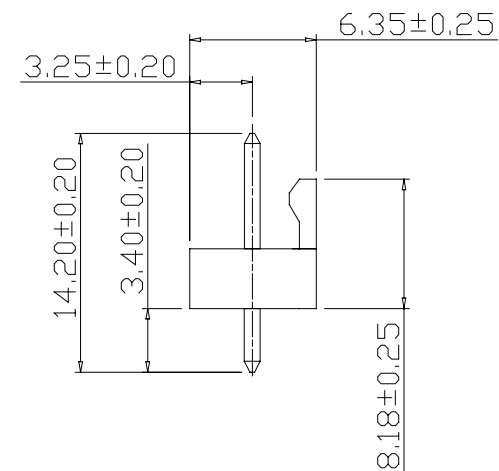

PART NO.	Dimensions	
	A	B
2544S-02TR-L	2.54	5.08
2544S-03TR-L	5.08	7.62
2544S-04TR-L	7.62	10.16
2544S-05TR-L	10.16	12.70
2544S-06TR-L	12.70	15.24
2544S-07TR-L	15.24	17.78
2544S-08TR-L	17.78	20.32
2544S-09TR-L	20.32	22.86
2544S-10TR-L	22.86	25.40
2544S-11TR-L	25.40	27.94
2544S-12TR-L	27.94	30.48
2544S-13TR-L	30.48	33.02
2544S-14TR-L	33.02	35.56
2544S-15TR-L	35.56	38.10
2544S-16TR-L	38.10	40.64
2544S-17TR-L	40.64	43.18
2544S-18TR-L	43.18	45.72
2544S-19TR-L	45.72	48.26
2544S-20TR-L	48.26	50.80

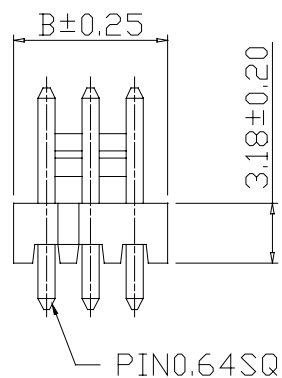

PartNo.: 2544S-XXTR-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2544S-XXTR-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	