
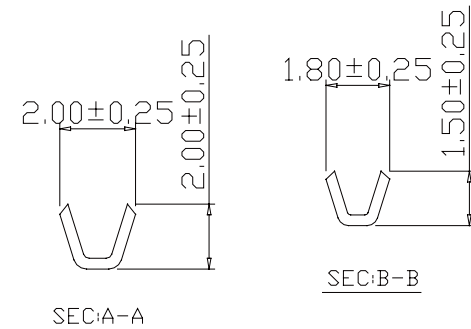
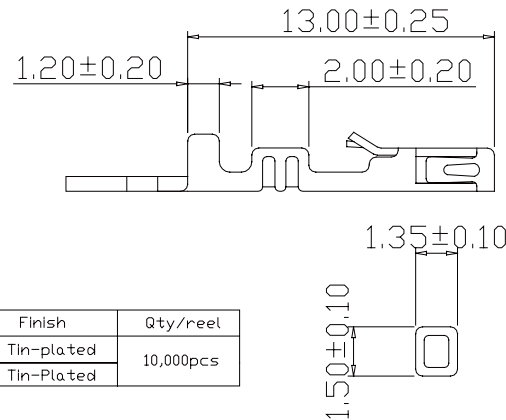


PAGE	318	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,4	1.0


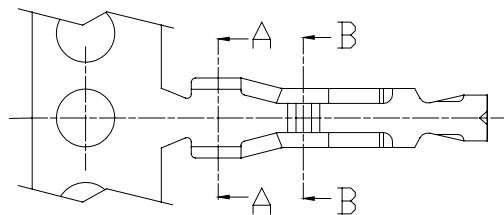


Part No	Wire Range	Insulation O.D	Material	Finish	Qty/reel
2545-TP-L	AWG#24-#28	1.60mm(max)	Phosphor Bronze	Tin-plated	10,000pcs
2545-TB-L	AWG#24-#28	1.60mm(max)	Brass	Tin-Plated	

PartNo.: 2545-T-L

SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 1500V AC/minute
Material: PBT30%GF, UL94V-0
Color: Natural(Black)

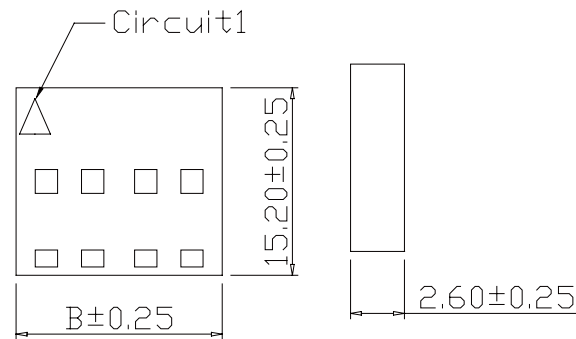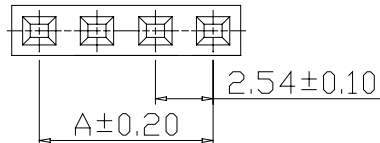

PartNo.: 2545H-XXBB-L

PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B
2545H-02BB-L	2.54	5.20	2545H-14BB-L	33.02	35.80
2545H-03BB-L	5.08	7.80	2545H-15BB-L	35.56	38.30
2545H-04BB-L	7.62	10.30	2545H-16BB-L	38.10	40.90
2545H-05BB-L	10.16	12.90	2545H-17BB-L	40.64	43.40
2545H-06BB-L	12.70	15.40	2545H-18BB-L	43.18	46.00
2545H-07BB-L	15.24	18.00	2545H-19BB-L	45.72	48.50
2545H-08BB-L	17.78	20.50	2545H-20BB-L	48.26	51.10
2545H-09BB-L	20.32	23.10	2545H-21BB-L	50.80	53.60
2545H-10BB-L	22.86	25.60	2545H-22BB-L	53.34	56.20
2545H-11BB-L	25.40	28.10	2545H-23BB-L	55.88	58.70
2545H-12BB-L	27.94	30.70	2545H-24BB-L	58.42	61.20
2545H-13BB-L	30.48	33.20	2545H-25BB-L	60.96	63.80

APPRO	CHECK	DRAWN	PART NO.	Part No.:2545H-XXBB-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	