
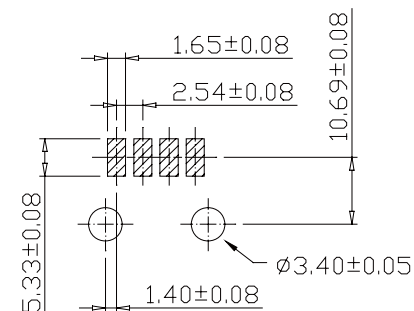
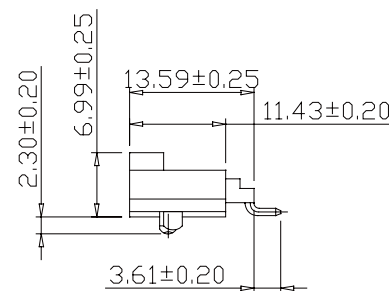





PAGE	319	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,5	1.0

SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Gold-flash
Material: Nylon 6T, UL94V-0
Color: Natural(Black)

PART NO.	Dimensions	
	A	B
2545MR-02GB-U	2.54	8.89
2545MR-03GB-U	5.08	11.43
2545MR-04GB-U	7.62	13.97
2545MR-05GB-U	10.16	16.51
2545MR-06GB-U	12.70	19.05
2545MR-07GB-U	15.24	21.59
2545MR-08GB-U	17.78	24.13
2545MR-09GB-U	20.32	26.67
2545MR-10GB-U	22.86	29.21
2545MR-11GB-U	25.40	31.75
2545MR-12GB-U	27.94	34.29



P.C.B LAYOUT

PartNo.:2545MR-XXGB-U

APPRO	CHECK	DRAWN	PART NO.	Part No.:2545MR-XXGB-U			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
			Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com					