



PAGE	300	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,4	1.0



SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 500mΩ Min
Withstanding Voltage: 800V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 66, UL94V-0
Color: Natural(White)



P.C.B LAYOUT

PART NO.	Dimensions	
	A	B
2500R-02TW-L	2.00	5.00
2500R-03TW-L	4.00	7.50
2500R-04TW-L	6.00	10.00
2500R-05TW-L	8.00	12.50
2500R-06TW-L	10.00	15.00
2500R-07TW-L	12.00	17.50
2500R-08TW-L	14.00	20.00
2500R-09TW-L	16.00	22.50
2500R-10TW-L	18.00	25.00
2500R-11TW-L	20.00	27.50
2500R-12TW-L	22.00	30.00

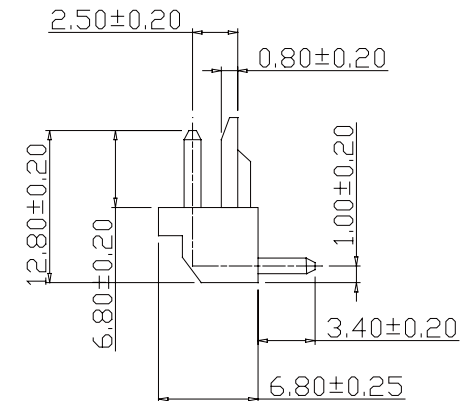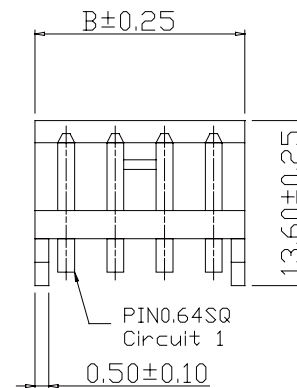

PartNo.: 2500R-XXTW-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2500R-XXTW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	