



PAGE	320	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,5	1.0

SPECIFICATIONS



Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Gold-flash
Material: PBT30%GF, UL94V-0
Color: Natural(Black)



2P




3P

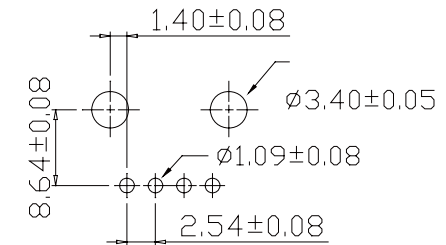


P.C.B. LAYOUT

PART NO.	Dimensions	
	A	B
2545R-02GB1-L	2.54	8.89
2545R-03GB1-L	5.08	11.43
2545R-04GB1-L	7.62	13.97
2545R-05GB1-L	10.16	16.51
2545R-06GB1-L	12.70	19.05
2545R-07GB1-L	15.24	21.59
2545R-08GB1-L	17.78	24.13
2545R-09GB1-L	20.32	26.67
2545R-10GB1-L	22.86	29.21
2545R-11GB1-L	25.40	31.75
2545R-12GB1-L	27.94	34.29

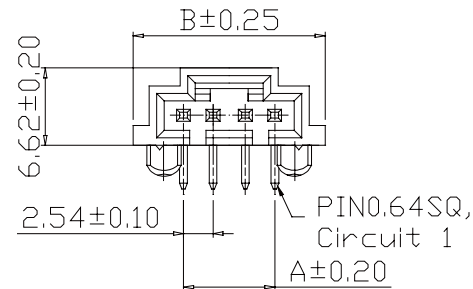

PartNo.: 2545R-XXGB1-L

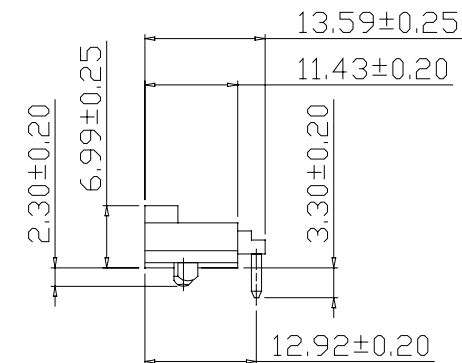

APPRO	CHECK	DRAWN	PART NO.	Part No.:2545R-XXGB1-L	DESCRIPTION	
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	no
			TOLER		NO.	
Tel:0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com						