

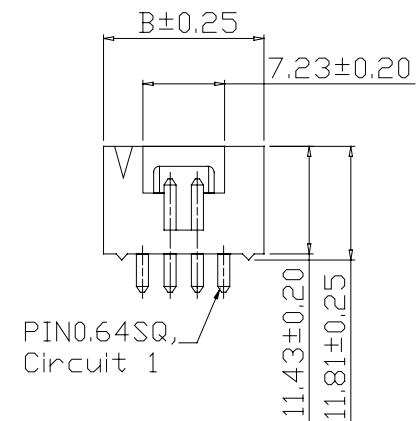


SPECIFICATIONS


Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Gold-flash
Material: PBT30%GF, UL94V-0
Color: Natural(Black)




PART NO.	Dimensions	
	A	B
2545S-02GB-L	2.54	7.59
2545S-03GB-L	5.08	10.13
2545S-04GB-L	7.62	12.67
2545S-05GB-L	10.16	15.21
2545S-06GB-L	12.70	17.75
2545S-07GB-L	15.24	20.29
2545S-08GB-L	17.78	22.83
2545S-09GB-L	20.32	25.37
2545S-10GB-L	22.86	27.91
2545S-11GB-L	25.40	30.45
2545S-12GB-L	27.94	32.99




P.C.B LAYOUT



3P



2P



PartNo.: 2545S-XXGB-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2545S-XXGB-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
				Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com				