

PAGE	319	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,5	1.0

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25℃ ~ +85℃

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000mΩ Min



Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Gold-flash


Material: PBT30%GF, UL94V-0

Color: Natural(Black)


PART NO.	Dimensions	
	A	B
2545S-02GB2-L	2.54	7.63
2545S-03GB2-L	5.08	10.17
2545S-04GB2-L	7.62	12.71
2545S-05GB2-L	10.16	15.25
2545S-06GB2-L	12.70	17.79
2545S-07GB2-L	15.24	20.33
2545S-08GB2-L	17.78	22.87
2545S-09GB2-L	20.32	25.41
2545S-10GB2-L	22.86	27.95
2545S-11GB2-L	25.40	30.49
2545S-12GB2-L	27.94	33.03

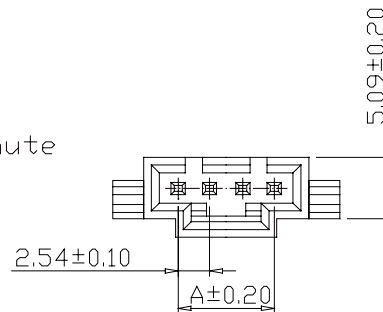



2P



3P

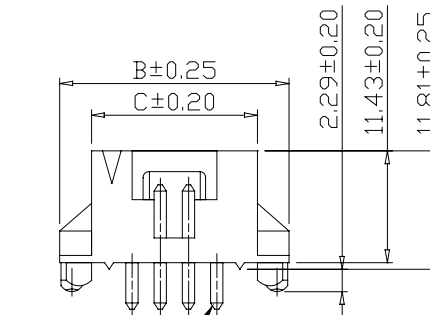

PIN0.64SQ,
Circuit 1



P.C.B LAYOUT

PartNo.:2545S-XXGB2-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2545S-XXGB2-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	