

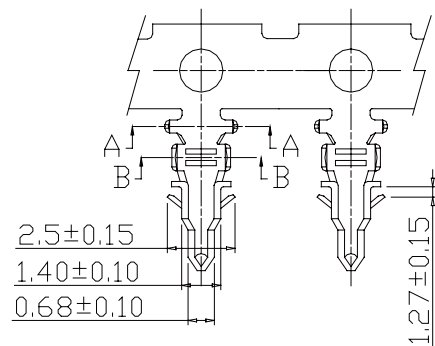



PAGE	323	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,5	1.0



PartNo.:3000-M T-L

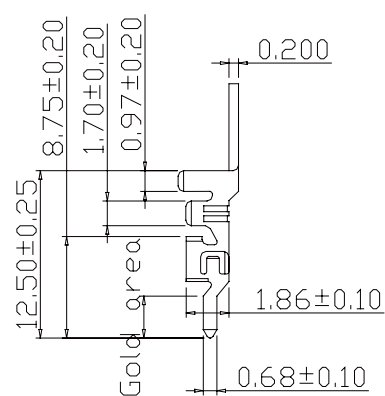

SEC:A-A






SEC:B-B

Wire Range	Insulation D.D	Material	Finish	Qty/reel
AWG#20-#24	1.85mm(max)	Phosphor Bronze	Tin-plated	15,000pcs

SPECIFICATIONS
Current Rating: 5A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66, UL94V-2
Color: Black

PartNo.:3000H-F2XXB-L

PART NO.	Dimensions	
	A	B
3000H-F201B-L	---	3.85
3000H-F202B-L	3.00	6.85
3000H-F203B-L	6.00	9.85
3000H-F204B-L	9.00	12.85
3000H-F205B-L	12.00	15.85
3000H-F206B-L	15.00	18.85
3000H-F207B-L	18.00	21.85
3000H-F208B-L	21.00	24.85
3000H-F209B-L	24.00	27.85
3000H-F210B-L	27.00	30.85
3000H-F211B-L	30.00	33.03
3000H-F212B-L	33.00	36.85

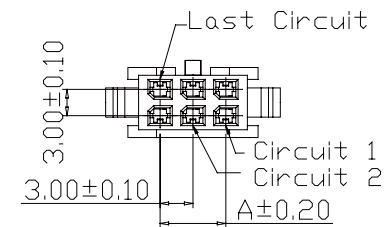

APPRO	CHECK	DRAWN	PART NO.	Part No.:3000H-F2XXB-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	