
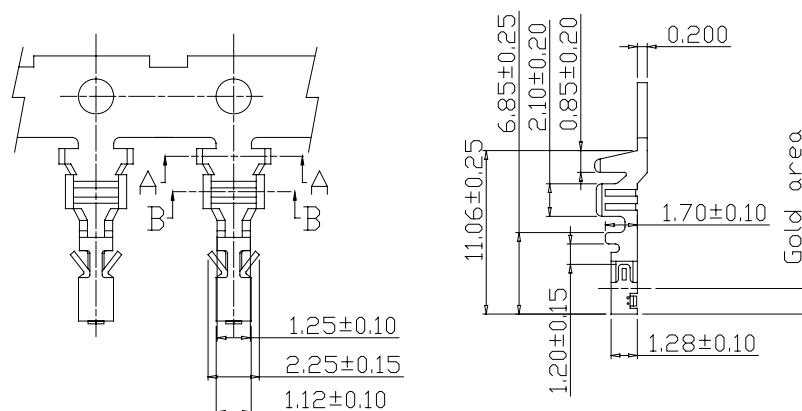


SEC:A-A



SEC:B-B

Wire Range	Insulation O.D	Material	Finish	Qty/reel
AWG#20-#24	1.85mm(max)	Phosphor Bronze	Tin-plated	15,000pcs









PartNo.: 3000-FT-L

SPECIFICATIONS

Current Rating: 5A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000mΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66, UL94V-2
 Color: Black

PART NO.	Dimensions	
	A	B
3000H-M201B-L	---	3.80
3000H-M202B-L	3.00	6.80
3000H-M203B-L	6.00	9.80
3000H-M204B-L	9.00	12.80
3000H-M205B-L	12.00	15.80
3000H-M206B-L	15.00	18.80
3000H-M207B-L	18.00	21.80
3000H-M208B-L	21.00	24.80
3000H-M209B-L	24.00	27.80
3000H-M210B-L	27.00	30.80
3000H-M211B-L	30.00	33.00
3000H-M212B-L	33.00	36.80

PartNo.: 3000H-M 2X XB-L



APPRO	CHECK	DRAWN	PART NO.	Part No.:3000H-M2XXB-L		
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	no
			TOLER		NO.	

DESCRIPTION



Tel:0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com