

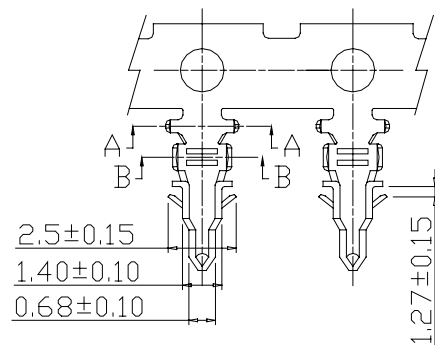



PAGE	323	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,5	1.0



PartNo.: 3000-M T-L

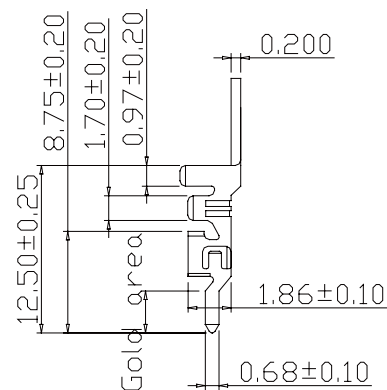

SEC:A-A



SEC:B-B




Wire Range	Insulation O.D	Material	Finish	Qty/reel
AWG#20-#24	1.85mm(max)	Phosphor Bronze	Tin-plated	15,000pcs

SPECIFICATIONS

Current Rating: 5A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66, UL94V-2
Color: Black

PART NO.	Dimensions	
	A	B
3000H-F102B-L	3.00	6.85
3000H-F103B-L	6.00	9.85
3000H-F104B-L	9.00	12.85
3000H-F105B-L	12.00	15.85
3000H-F106B-L	15.00	18.85
3000H-F107B-L	18.00	21.85
3000H-F108B-L	21.00	24.85
3000H-F109B-L	24.00	27.85
3000H-F110B-L	27.00	30.85
3000H-F111B-L	30.00	33.03
3000H-F112B-L	33.00	36.85

PartNo.: 3000H-F1XXB-L

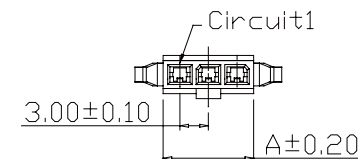

APPRO	CHECK	DRAWN	PART NO.	Part No.:3000H-F1XXB-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com								