



PAGE	324	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,5	1.0

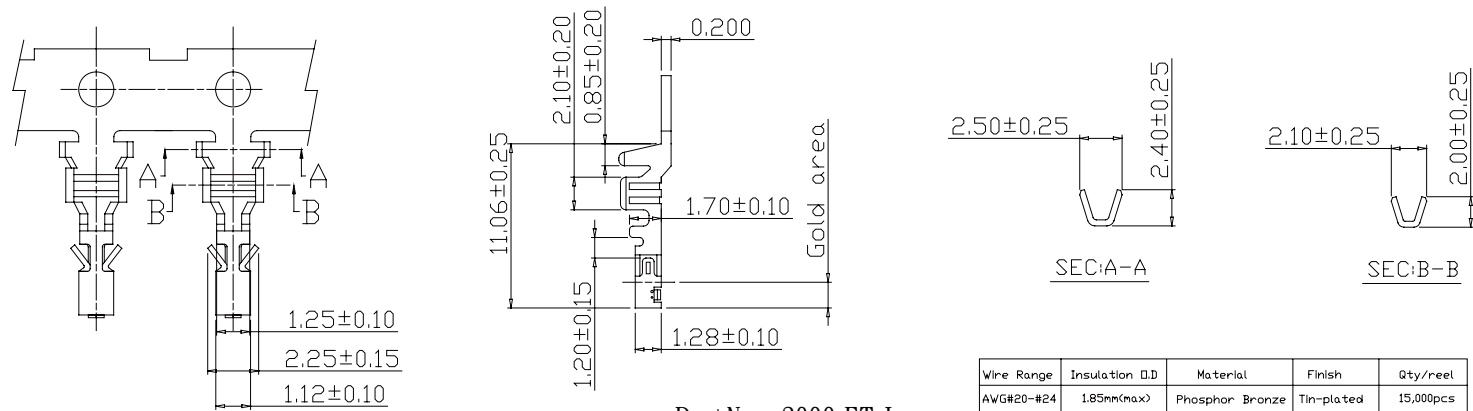

SPECIFICATIONS
Current Rating: 5A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66, UL94V-2
Color: Black

PART NO.	Dimensions	
	A	B
3000H-M102B-L	3.00	6.80
3000H-M103B-L	6.00	9.80
3000H-M104B-L	9.00	12.80
3000H-M105B-L	12.00	15.80
3000H-M106B-L	15.00	18.80
3000H-M107B-L	18.00	21.80
3000H-M108B-L	21.00	24.80
3000H-M109B-L	24.00	27.80
3000H-M110B-L	27.00	30.80
3000H-M111B-L	30.00	33.00
3000H-M112B-L	33.00	36.80

PartNo.: 3000H-M 1X XB-L

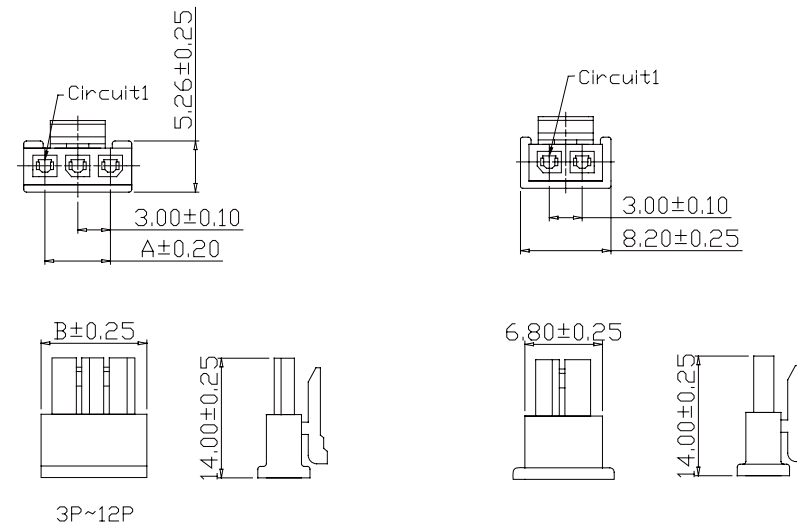

APPRO	CHECK	DRAWN	PART NO.	Part No.:3000H-M1XXB-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
							Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	