


Current Rating: 5A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25℃ ~ +85℃
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin-plated
Material: PBT15%GF, UL94V-0
Color: Natural(Black)

PART NO.	Dimensions	
	A	B
3000R-102TB-L	3.00	9.65
3000R-103TB-L	6.00	12.65
3000R-104TB-L	9.00	15.65
3000R-105TB-L	12.00	18.65
3000R-106TB-L	15.00	21.65
3000R-107TB-L	18.00	24.65
3000R-108TB-L	21.00	27.65
3000R-109TB-L	24.00	30.65
3000R-110TB-L	27.00	33.65
3000R-111TB-L	30.00	36.65
3000R-112TB-L	33.00	39.65

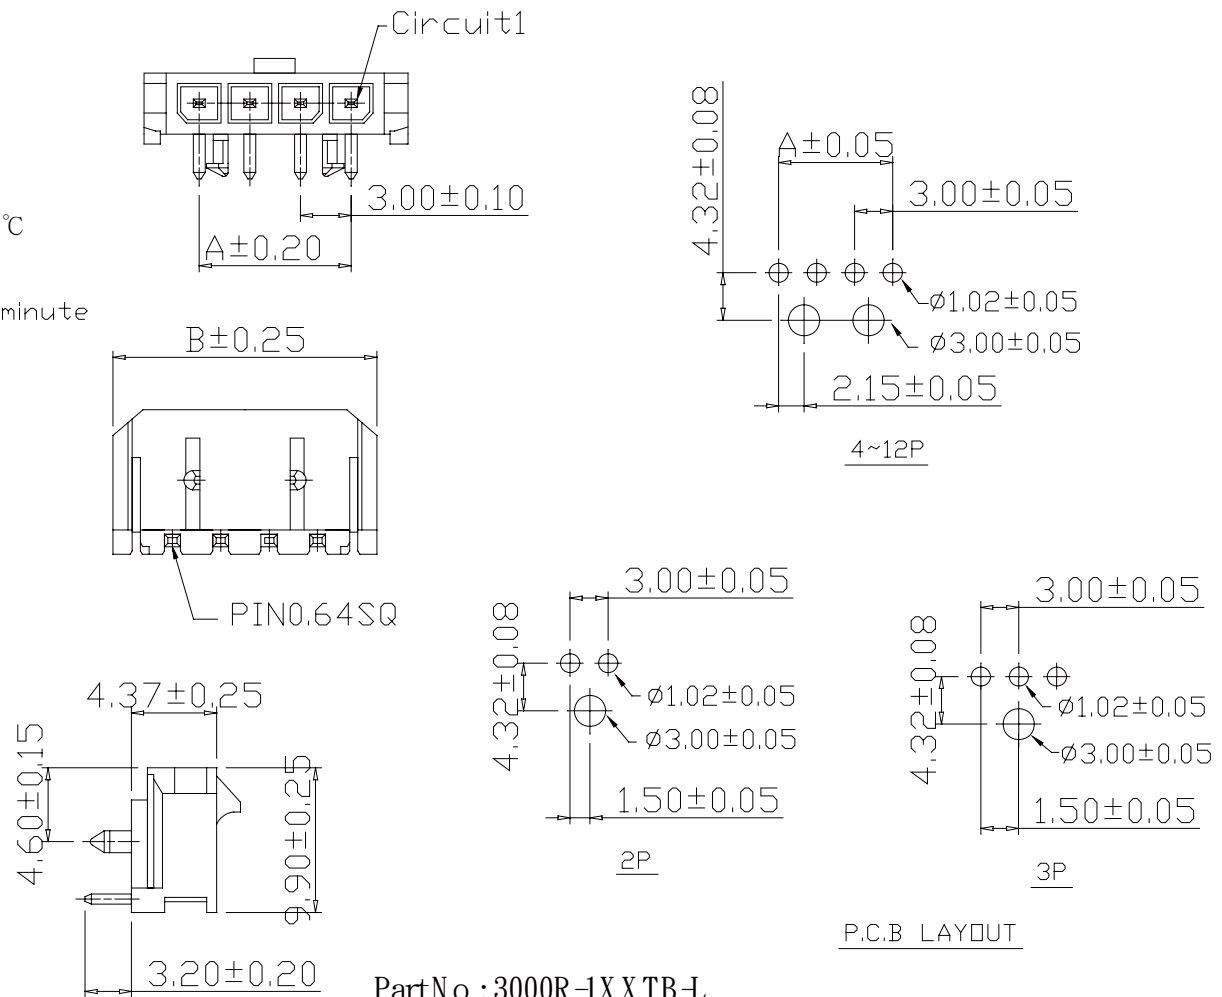

APPRO	CHECK	DRAWN	PART NO.	Part No.:3000R-1XXTB-L			DESCRIPTION		
			ITEM NO.						
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com		