
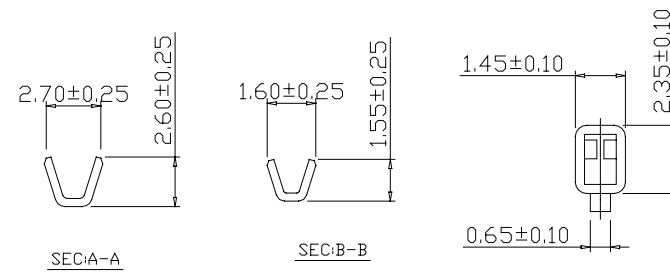


BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,4	1.0

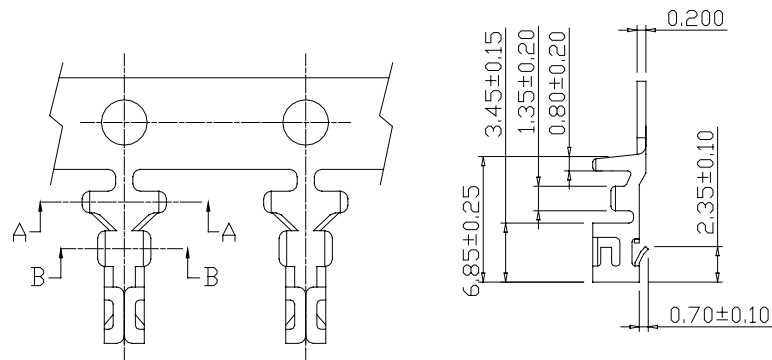


Wire Range	Insulation O.D	Material	Finish	Qty/reel
AWG#22-#28	1.75mm(max)	Brass	Tin-plated	8,000pcs


PartNo.: 2502-T-L

SPECIFICATIONS
 Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000mΩ Min
 Withstanding Voltage: 800V AC/minute
 Material: Nylon 66, UL94V-2
 Pantone Color: 7501C

PART NO.	Dimensions	
	A	B
2502H-02W-L	2.50	6.00
2502H-03W-L	5.00	8.50
2502H-04W-L	7.50	11.00
2502H-05W-L	10.00	13.50
2502H-06W-L	12.50	16.00
2502H-07W-L	15.00	18.50
2502H-08W-L	17.50	21.00
2502H-09W-L	20.00	23.50
2502H-10W-L	22.50	26.00
2502H-11W-L	25.00	28.50
2502H-12W-L	27.50	31.00
2502H-13W-L	30.00	33.50
2502H-14W-L	32.50	36.00
2502H-15W-L	35.00	38.50
2502H-16W-L	37.50	41.00
2502H-17W-L	40.00	43.50
2502H-18W-L	42.50	46.00
2502H-19W-L	45.00	48.50
2502H-20W-L	47.50	51.00

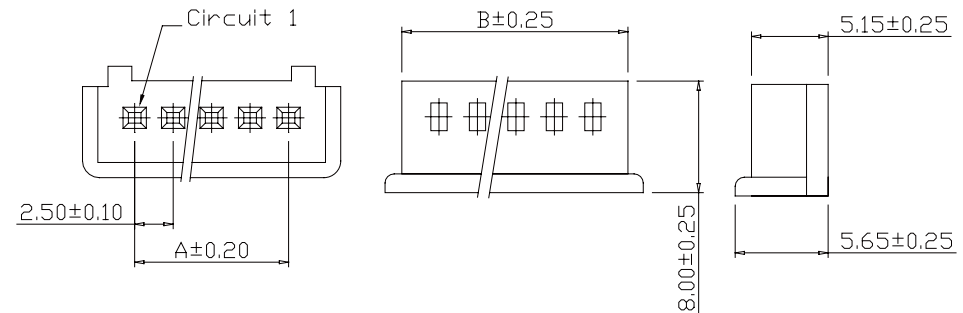

PartNo.: 2502H-XXW-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:2502H-XXW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
							Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	