
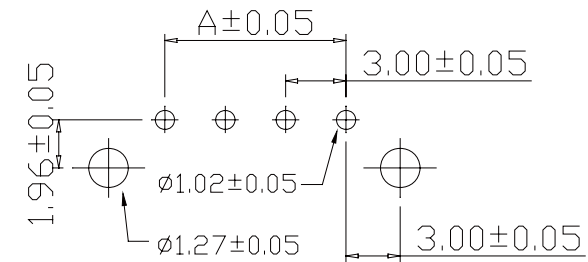


PAGE	325	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,5	1.0



SPECIFICATIONS

Current Rating: 5A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Contact Resistance: $10\text{m}\Omega$ Max
 Insulation Resistance: $1000\text{m}\Omega$ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: PBT15%GF, UL94V-0
 Color: Natural(Black)

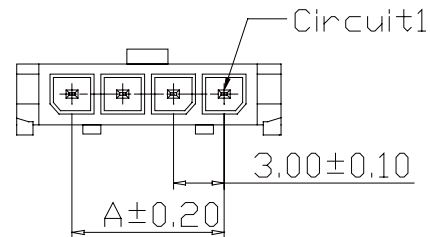

P.C.B LAYOUT

PART NO.	Dimensions	
	A	B
3000S-102TB-L	3.00	9.65
3000S-103TB-L	6.00	12.65
3000S-104TB-L	9.00	15.65
3000S-105TB-L	12.00	18.65
3000S-106TB-L	15.00	21.65
3000S-107TB-L	18.00	24.65
3000S-108TB-L	21.00	27.65
3000S-109TB-L	24.00	30.65
3000S-110TB-L	27.00	33.65
3000S-111TB-L	30.00	36.65
3000S-112TB-L	33.00	39.65

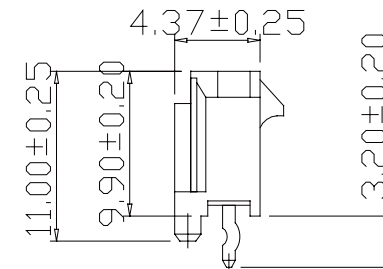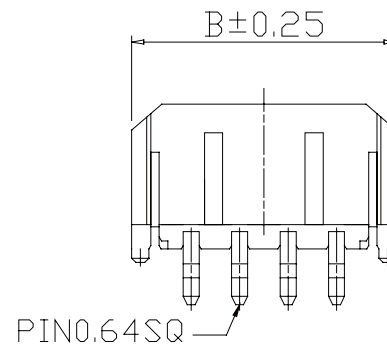

PartNo.: 3000S-1XXTB-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:3000S-1XXTB-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	