



PAGE	326	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,5	1 0

SPECIFICATIONS



Current Rating: 5A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Contact Resistance: $10\text{m}\Omega$ Max
 Insulation Resistance: $1000\text{m}\Omega$ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: PBT15%GF, UL94V-0
 Color: Natural(Black)

PART NO.	Dimensions	
	A	B
3000S-201TB-L	---	6.65
3000S-202TB-L	3.00	9.65
3000S-203TB-L	6.00	12.65
3000S-204TB-L	9.00	15.65
3000S-205TB-L	12.00	18.65
3000S-206TB-L	15.00	21.65
3000S-207TB-L	18.00	24.65
3000S-208TB-L	21.00	27.65
3000S-209TB-L	24.00	30.65
3000S-210TB-L	27.00	33.65
3000S-211TB-L	30.00	36.65
3000S-212TB-L	33.00	39.65

Last Circuit

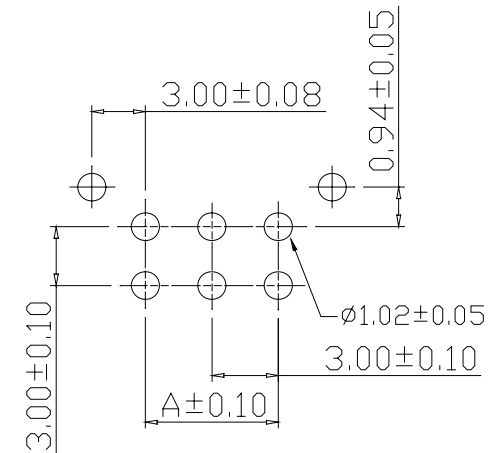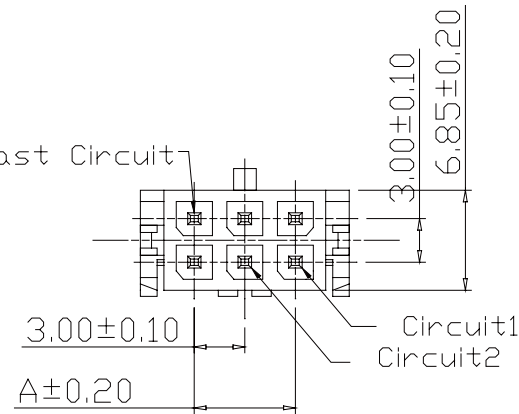

P.C.B LAYOUT

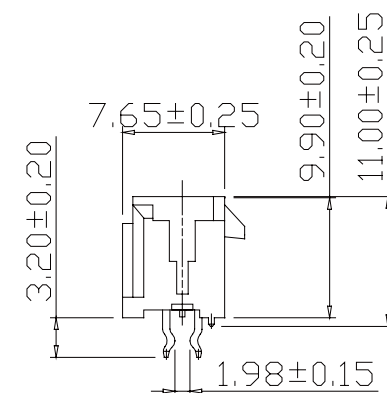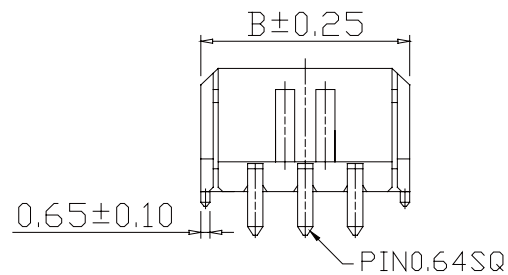

Part No.: 3000S-2X X TB-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:3000S-2XXTB-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	