




PAGE	327	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,5	1.0

ORDER INFORMATION




SPECIFICATIONS
 Current Rating: 5A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000mΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66, UL94V-2

3	9	6	0	I	D	C	-	X	X	X	X	X	-	L					
				No. of contacts per row (02-25)				T: Tin Plated G: Gold Flash S: Selective G: 50u" S: 50u" G: 10u" S: 10u" G: 20u" S: 20u" G: 30u" S: 30u"				W: Nylon natural B: Black insulator U: Blue insulator R: Red insulator G: Green insulator				18: 18 AWG 20: 20 AWG 22: 22 AWG 24: 24 AWG 26: 26 AWG		L: RoHS+Nylon 66	

CONTACT	Dimensions	
	A	B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
17	63.36	67.32
18	67.62	71.28
19	71.28	75.24
20	75.24	79.20
21	79.20	83.16
22	83.16	87.12
23	87.12	91.08
24	91.08	95.04
25	95.04	99.00



COVER

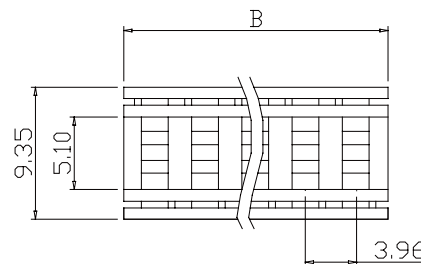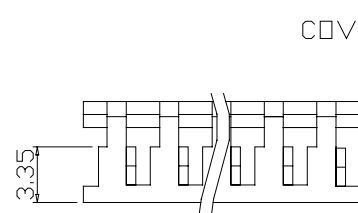

PartNo.: 3960IDC-C-L

APPRO	CHECK	DRAWN	PART NO.	Part No.:3960IDC-C-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	