

SPECIFICATIONS

Current Rating: 5A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000mΩ Min




Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin-plated


Material: Nylon 66, UL94V-2

Color: Natural(Translucent)

PART NO.	Dimensions	
	A	B
3691RA-02TW-L	3.96	7.92
3691RA-03TW-L	7.92	11.88
3691RA-04TW-L	11.88	15.84
3691RA-05TW-L	15.84	19.80
3691RA-06TW-L	19.80	23.76
3691RA-07TW-L	23.76	27.72
3691RA-08TW-L	27.72	31.68
3691RA-09TW-L	31.68	35.64
3691RA-10TW-L	35.64	39.60
3691RA-11TW-L	39.60	43.56
3691RA-12TW-L	43.56	47.52
3691RA-13TW-L	47.52	51.48
3691RA-14TW-L	51.48	55.44
3691RA-15TW-L	55.44	59.40
3691RA-16TW-L	59.40	63.36
3691RA-17TW-L	63.36	67.32
3691RA-18TW-L	67.32	71.28
3691RA-19TW-L	71.28	75.24
3691RA-20TW-L	75.24	79.20

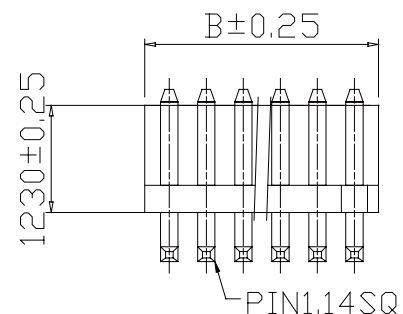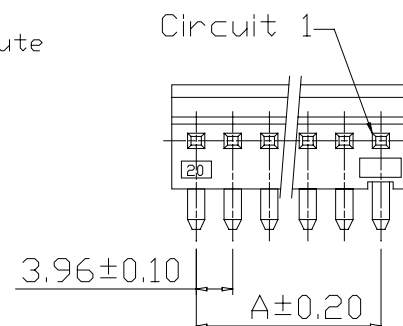

P.C.B. LAYOUT

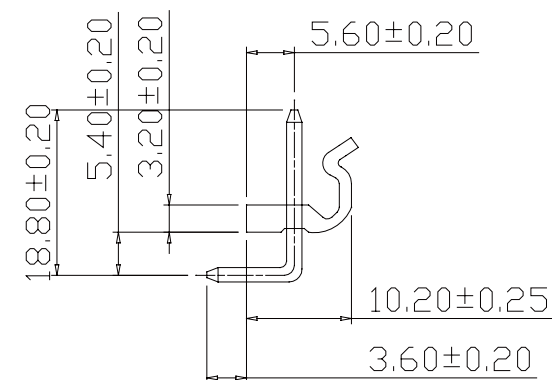

PartNo.:3961RA-XXTW -L

APPRO

CHECK

DRAWN

PART NO.

Part No.:3961RA-XXTW-L

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

DESCRIPTION



Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com