




PAGE	330	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,5	1.0

SPECIFICATIONS
 Current Rating: 5A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25℃ ~ +85℃
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000mΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66, UL94V-2
 Color: Natural(Translucent)


PART NO.	Dimensions	
	A	B
3691RB-02TW-L	3.96	7.92
3691RB-03TW-L	7.92	11.88
3691RB-04TW-L	11.88	15.84
3691RB-05TW-L	15.84	19.80
3691RB-06TW-L	19.80	23.76
3691RB-07TW-L	23.76	27.72
3691RB-08TW-L	27.72	31.68
3691RB-09TW-L	31.68	35.64
3691RB-10TW-L	35.64	39.60
3691RB-11TW-L	39.60	43.56
3691RB-12TW-L	43.56	47.52
3691RB-13TW-L	47.52	51.48
3691RB-14TW-L	51.48	55.44
3691RB-15TW-L	55.44	59.40
3691RB-16TW-L	59.40	63.36
3691RB-17TW-L	63.36	67.32
3691RB-18TW-L	67.32	71.28
3691RB-19TW-L	71.28	75.24
3691RB-20TW-L	75.24	79.20

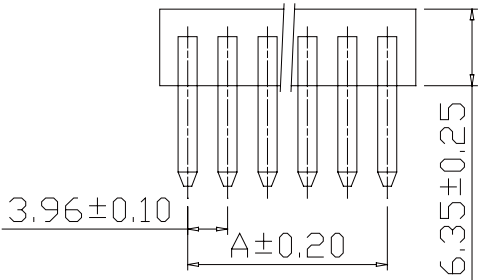

P.C.B LAYOUT



PartNo.: 3961RB-XXTW -L

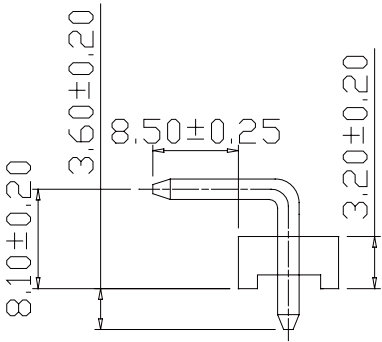

APPRO	CHECK	DRAWN	PART NO.	Part No.:3961RB-XXTW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	