

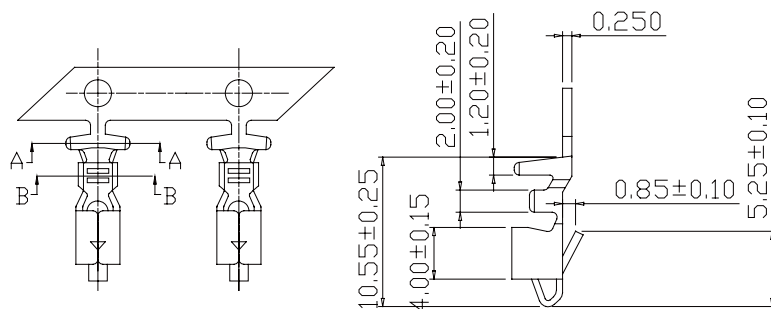


SEC: A-A



SEC: B-B





Part No	Wire Range	Insulation O.D	Material	Finish	Qty/reel
3962-TB-L	AWG#18-#22	3.00mm(max)	Brass	Tin-plated	4,000pcs
3962-TP-L	AWG#18-#22	3.00mm(max)	Phosphor Bronze	Tin-Plated	

PartNo.: 3962-T-L

SPECIFICATIONS

Current Rating: 5A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000mΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66, UL94V-2
 Color: Natural(White)

PART NO.	Dimensions	
	A	B
3962H-02W-L	3.96	8.02
3962H-03W-L	7.92	11.98
3962H-04W-L	11.88	15.94
3962H-05W-L	15.84	19.90
3962H-06W-L	19.80	23.86
3962H-07W-L	23.76	27.82
3962H-08W-L	27.72	31.78
3962H-09W-L	31.68	35.74
3962H-10W-L	35.64	39.70
3962H-11W-L	39.60	43.66
3962H-12W-L	43.56	47.62
3962H-13W-L	47.52	51.58
3962H-14W-L	51.48	55.54
3962H-15W-L	55.44	59.50

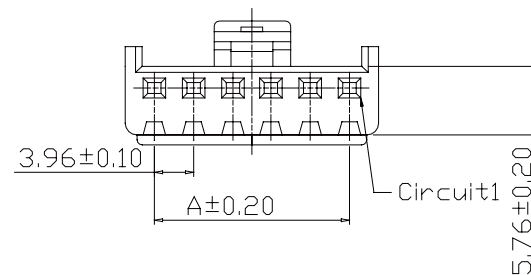

PartNo.: 3962H-XXW-L

APPRO

CHECK

DRAWN

PART NO.

Part No.:3962H-XXW-L

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

DESCRIPTION



Tel: 0769 22020068 Fax: 0769 22020069

E-mail: sales@vigortec.com