




SPECIFICATIONS


Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 66, UL94V-0
Color: Natural(White)

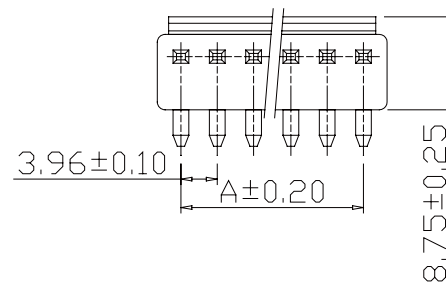

PART NO.	Dimensions	
	A	B
3962R-02TW-L	3.96	7.92
3962R-03TW-L	7.92	11.88
3962R-04TW-L	11.88	15.84
3962R-05TW-L	15.84	19.80
3962R-06TW-L	19.80	23.76
3962R-07TW-L	23.76	27.72
3962R-08TW-L	27.72	31.68
3962R-09TW-L	31.68	35.64
3962R-10TW-L	35.64	39.60
3962R-11TW-L	39.60	43.56
3962R-12TW-L	43.56	47.52
3962R-13TW-L	47.52	51.48
3962R-14TW-L	51.48	55.44
3962R-15TW-L	55.44	59.40

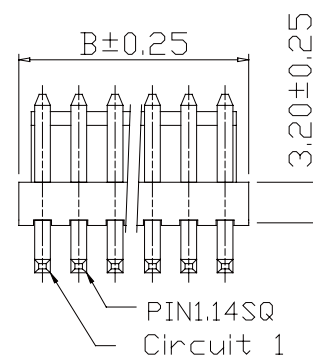

PartNo.: 3962R-XXTW-L

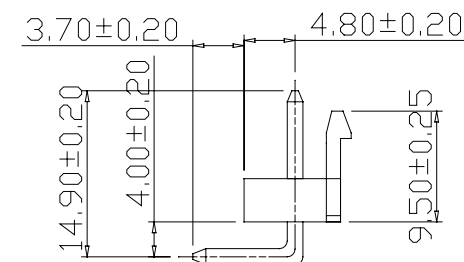

APPRO	CHECK	DRAWN	PART NO.	Part No.:3962R-XXTW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	