

SPECIFICATIONS

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max



Insulation Resistance: 1000mΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin-plated



Material: Nylon 66, UL94V-0

Color: Natural(White)

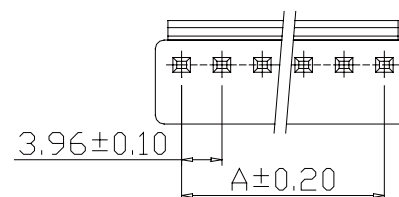

P.C.B LAYOUT

PART NO.	Dimensions	
	A	B
3962S-02TW-L	3.96	7.92
3962S-03TW-L	7.92	11.88
3962S-04TW-L	11.88	15.84
3962S-05TW-L	15.84	19.80
3962S-06TW-L	19.80	23.76
3962S-07TW-L	23.76	27.72
3962S-08T-L	27.72	31.68
3962S-09TW-L	31.68	35.64
3962S-10TW-L	35.64	39.60
3962S-11TW-L	39.60	43.56
3962S-12TW-L	43.56	47.52
3962S-13TW-L	47.52	51.48
3962S-14TW-L	51.48	55.44
3962S-15TW-L	55.44	59.40

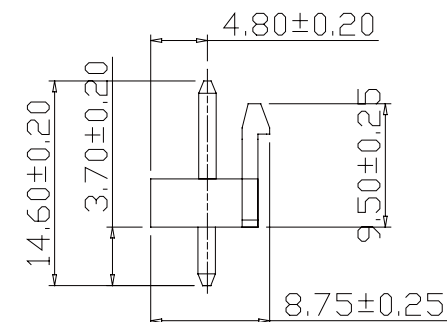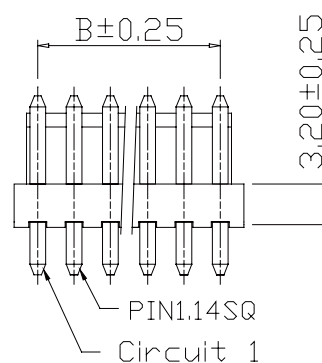

PartNo.: 3962S-XXTW -L

APPRO

CHECK

DRAWN

PART NO.

Part No.:3962S-XXTW-L

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

DESCRIPTION



Tel: 0769 22020068 Fax: 0769 22020069

E-mail: sales@vigortec.com