
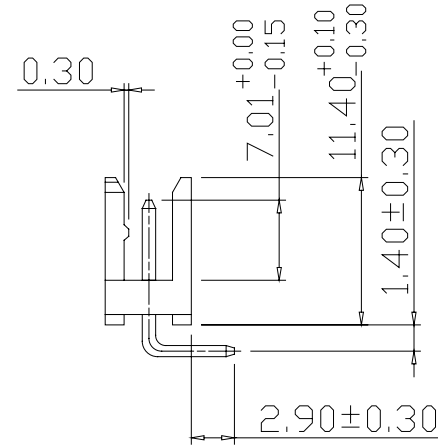
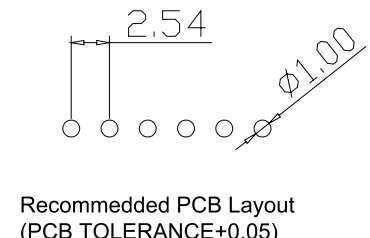
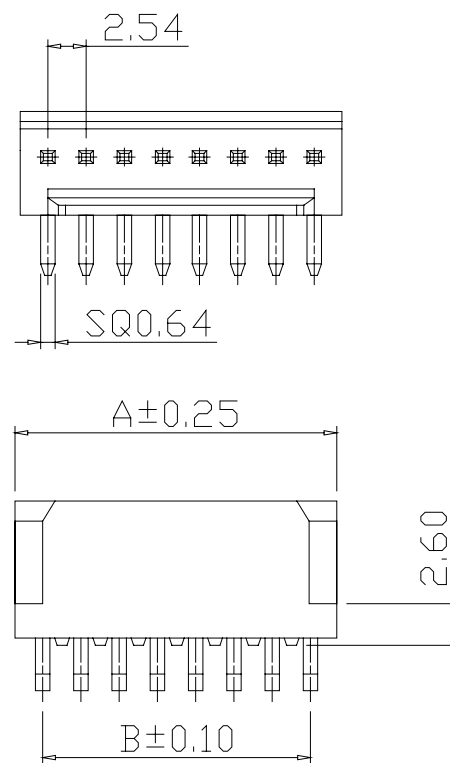


SPECIFICATIONS
 Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +105°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000mΩ Min
 Withstanding Voltage: 1000V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66, UL94V-0
 Pantone Color: Black

PART NO.	Dimensions	
	A	B
2217R-202TB-L	5.08	2.54
2217R-203TB-L	7.62	5.08
2217R-204TB-L	10.16	7.62
2217R-205TB-L	12.70	10.16
2217R-206TB-L	15.24	12.70
2217R-207TB-L	17.78	15.24
2217R-208TB-L	20.32	17.78
2217R-209TB-L	22.86	20.32
2217R-210TB-L	25.40	22.86
2217R-211TB-L	27.94	25.40
2217R-212TB-L	30.48	27.94
2217R-213TB-L	33.02	30.48
2217R-214TB-L	35.56	33.02
2217R-215TB-L	38.10	35.56
2217R-216TB-L	40.64	38.10
2217R-217TB-L	43.18	40.64
2217R-218TB-L	45.72	43.18
2217R-219TB-L	48.26	45.72
2217R-220TB-L	50.80	48.26



Part No.: 2217R-1XXTB-L

APPRO	CHECK	DRAWN	PART NO.	Part No.: 2217R-1XXTB-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
						Tel: 0769 22020068	Fax: 0769 22020069	E-mail: sales@vigortec.com