

SPECIFICATIONS

Current Rating: 5A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C






Contact Resistance: 10mΩ Max

Insulation Resistance: 1000mΩ Min


Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin-plated



Color: Natural(White)

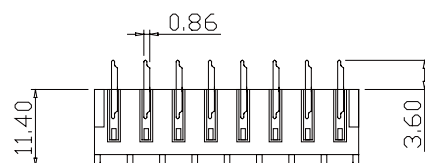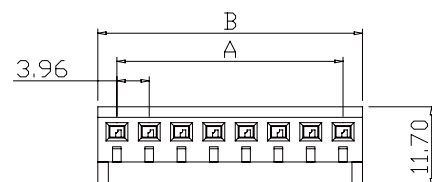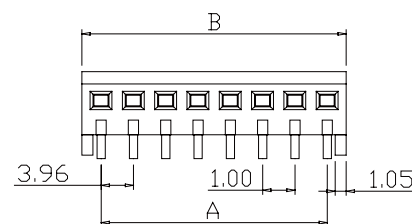

A Type



B Type

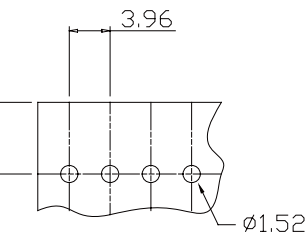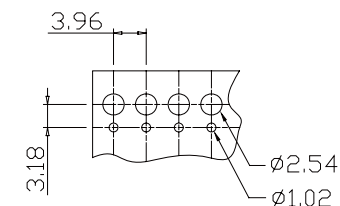Recommended PCB Layout(A,C Type)
(PCB TOLERANCE±0.05)Recommended PCB Layout(B Type)
(PCB TOLERANCE±0.05)

CONTACT	Dimensions	
	A	B
02	3.96	7.82
03	7.92	11.78
04	11.88	15.74
05	15.84	19.70
06	19.80	23.66
07	23.76	27.62
08	27.72	31.58
09	31.68	35.54
10	35.64	39.50
11	39.60	43.46
12	43.56	47.42
13	47.52	51.38
14	51.48	55.34
15	55.44	59.30
16	59.40	63.26
17	63.36	67.22
18	67.32	71.18
19	71.28	75.14
20	75.24	79.10
21	79.20	83.06
22	83.16	87.02
23	87.12	90.98
24	91.08	94.94
25	95.04	98.90

ORDER INFORMATION

3	9	6	4	X	-	X	X	X	W	-	L
A/A Type B/B Type C/C Type				T.Tin Plated GGold Flash GA5u" GB10u" GC20u" GD30u"				SSelective SA5u" SB10u" SC20u" SD30u"		No.of contacts per row (02-25)	
								W/Nylon natural		L/RoHS+Nylon 66	

APPRO

CHECK

DRAWN

PART NO.

Part No.:3964X-XXXW-L

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

DESCRIPTION

Tel: 0769 22020068 Fax: 0769 22020069

E-mail: sales@vigortec.com