



PAGE	336	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,5	1.0

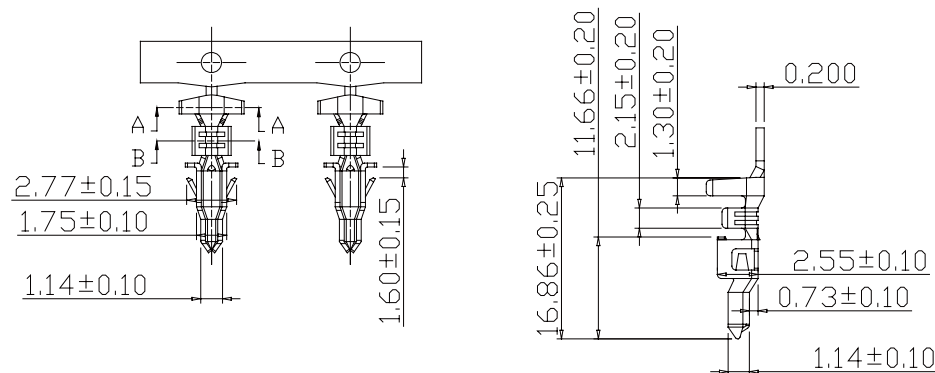

PartNo.: 4200-M T-L

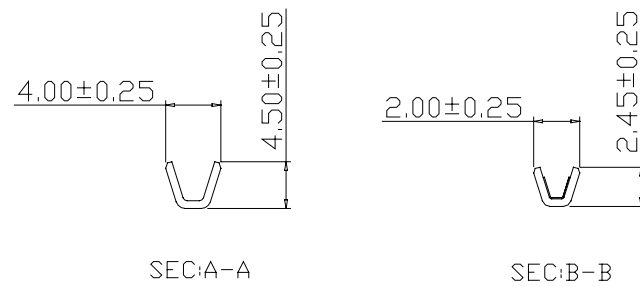


Wire Range	Insulation O.D	Material	Finish	Qty/reel
AWG#18-#24	3.10mm(max)	Brass	Tin-plated	5,000pcs

SPECIFICATIONS

Current Rating: 7A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66, UL94V-2
Color: Natural(Translucent)

PART NO.	Dimensions	
	A	B
4200H-F201W-L	---	5.40
4200H-F202W-L	4.20	9.60
4200H-F203W-L	8.40	13.80
4200H-F204W-L	12.60	18.00
4200H-F205W-L	16.80	22.20
4200H-F206W-L	21.00	26.40
4200H-F207W-L	25.20	30.60
4200H-F208W-L	29.40	34.80
4200H-F209W-L	33.60	39.00
4200H-F210W-L	37.80	43.20
4200H-F211W-L	42.00	47.40
4200H-F212W-L	46.20	51.60

PartNo.: 4200H-F2XXW-L

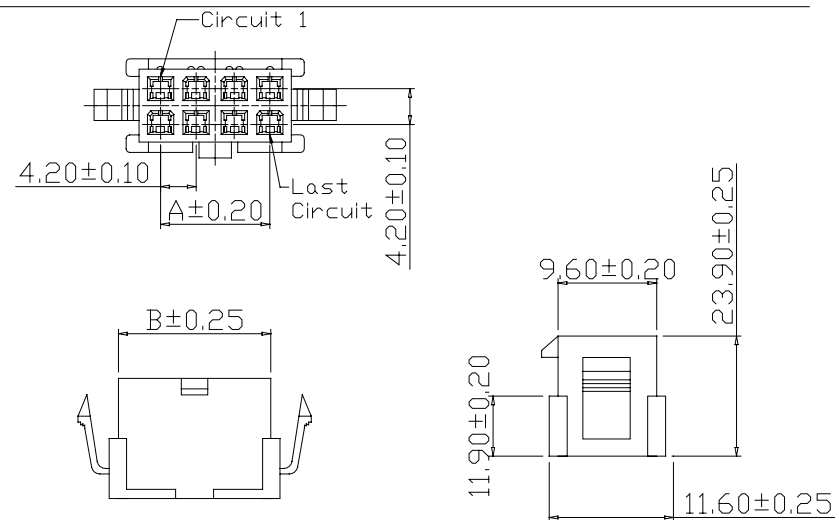

APPRO	CHECK	DRAWN	PART NO.	Part No.:4200H-F2XXW-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
				Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com				