

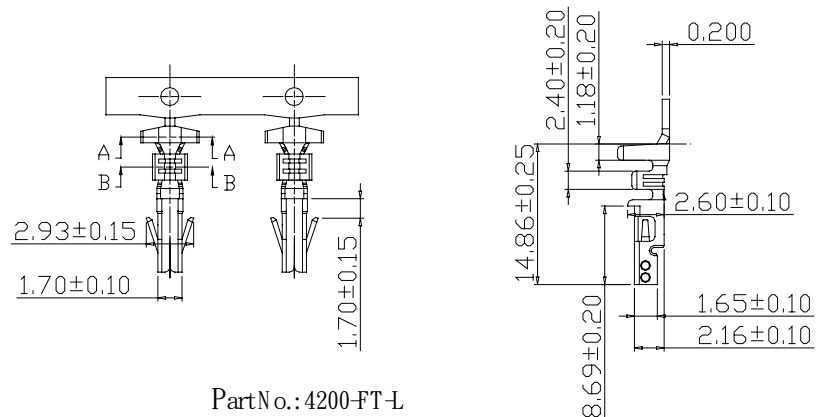




Part No.: 4200-FT-L








Wire Range	Insulation O.D	Material	Finish	Qty/ree
AWG#18-#24	3.10mm(max)	Brass	Tin-plated	5,000pcs

SPECIFICATIONS

S: LED Indicators
 Current Rating: 7A AC,DC
 Voltage Rating: 600V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66, UL94V-2
 Color: Natural(Transparent)

Part No.: 4200H-M 2X XW -L

PART NO.	Dimensions	
	A	B
4200H-M201W-L	---	5.70
4200H-M202W-L	4.20	9.60
4200H-M203W-L	8.40	13.50
4200H-M204W-L	12.60	17.40
4200H-M205W-L	16.80	21.30
4200H-M206W-L	21.00	25.20
4200H-M207W-L	25.20	29.10
4200H-M208W-L	29.40	33.00
4200H-M209W-L	33.60	36.90
4200H-M210W-L	37.80	40.80
4200H-M211W-L	42.00	44.70
4200H-M212W-L	46.20	48.60

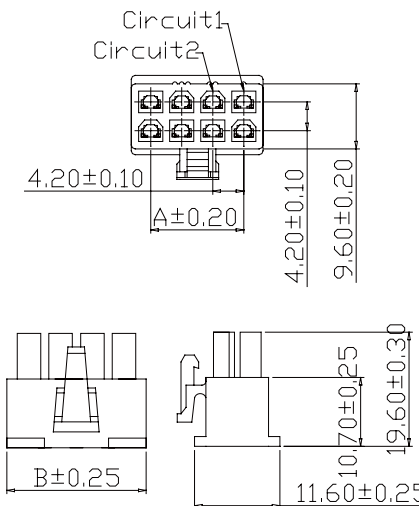

APPRO	CHECK	DRAWN	PART NO.	Part No.:4200H-M2XXW-L		
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	no
			TOLER		NO.	

DESCRIPTION



Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com