

SPECIFICATIONS

Current Rating: 0.5A AC,DC

Voltage Rating: 30V AC,DC

Temperature Range:-25°C ~ + 85°C

Contact Resistance:20mΩMax.

Insulation Resistance:100MΩMin.

Withstanding Voltage: 200V AC/minute

Pin Material:Phosphor Bronze/Tin-plated




Solder Tabs:Phosphor Bronze/Tin-plated

Material:Nylon 46,UL94V-0

Cap:Nylon 6T,UL94V-0,Natural(Beige)

Color:Natural(Beige)

PART NO.	Dimensions	
	A	B
0800MR-02TW-U	0.80	3.80
0800MR-04TW-U	2.40	5.40
0800MR-08TW-U	5.60	8.60
0800MR-10TW-U	7.20	10.20
0800MR-12TW-U	8.80	11.80
0800MR-14TW-U	10.40	13.40
0800MR-15TW-U	11.20	14.20
0800MR-16TW-U	12.00	15.00
0800MR-17TW-U	12.80	15.80
0800MR-20TW-U	15.20	18.20

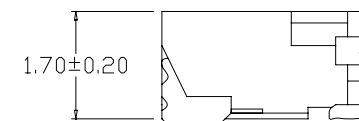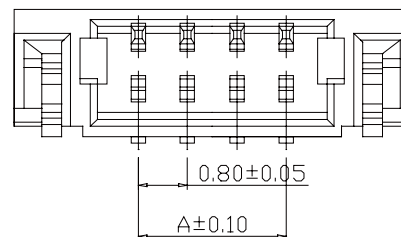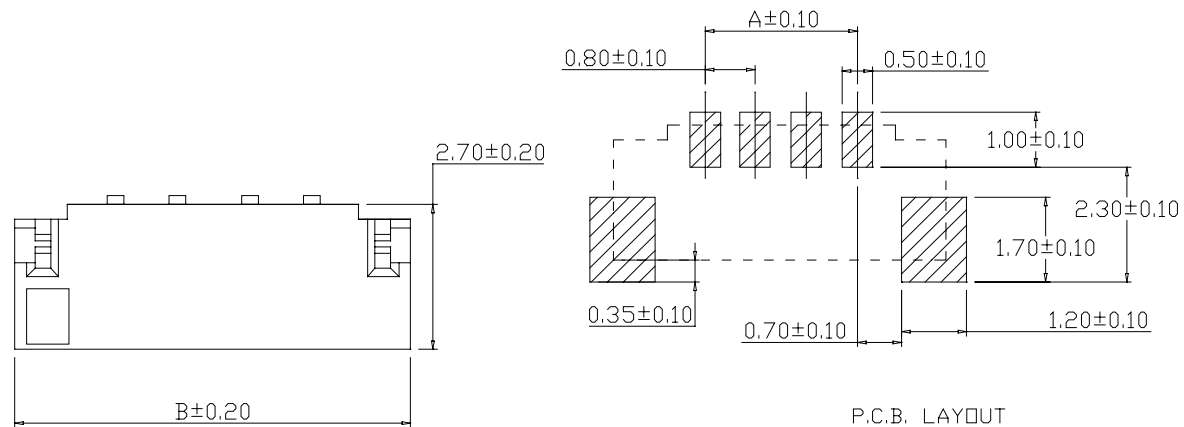

Part No.:0800MR-XXTW-U

APPRO	CHECK	DRAWN	PART NO.	Part No.:0800MR-XXTW-U			DESCRIPTION					
			ITEM NO.									
			DRAW NO.									
			UNIT	mm	SCALE	no						
			TOLER	NO.	Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com							