

SPECIFICATIONS

Current Rating: 7A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000m Ω Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin-plated







Material: Nylon 66, UL94V-2

Color: Natural(Translucent)

PartNo.:4200RQ-2X X TW ☐ -L

1. WTH POST
2. W/O POST
3. WTH MOUNT EAR

CONTACT	Dimensions	
	A	B
01	---	5.40
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40
07	25.20	30.60
08	29.40	34.80
09	33.60	39.00
10	37.80	43.20
11	42.00	47.40
12	46.20	51.60

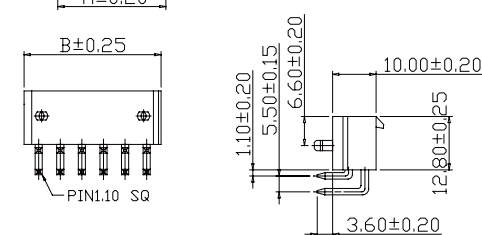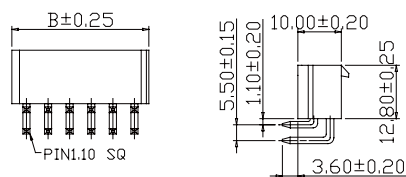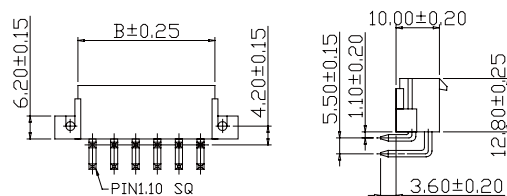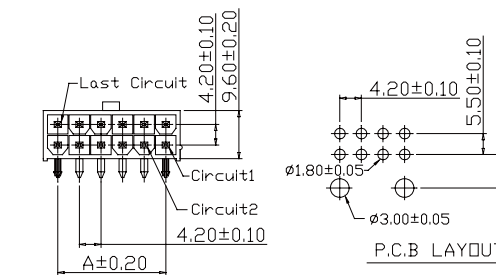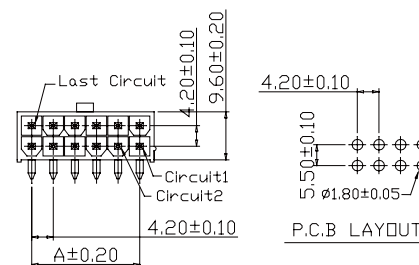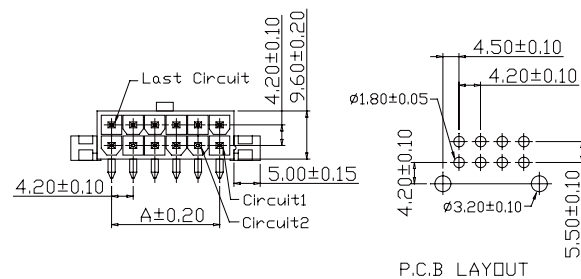

4200RQ-2XXTW3

4200RQ-2XXTW2

4200RQ-2XXTW1

APPRO	CHECK	DRAWN	PART NO.	Part No.:4200RQ-2XXTW-L			DESCRIPTION		
			ITEM NO.						
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO.				
				Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com					