


BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,6	1.0


SPECIFICATIONS

Current Rating: 7A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000mΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 66, UL94V-2
Color: Natural(Translucent)

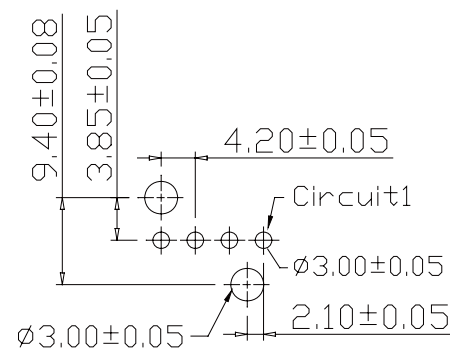


PART NO.	Dimensions	
	A	B
4200S-103TW1-L	8.40	13.80
4200S-104TW1-L	12.60	18.00
4200S-105TW1-L	16.80	22.20

P.C.B LAYOUT

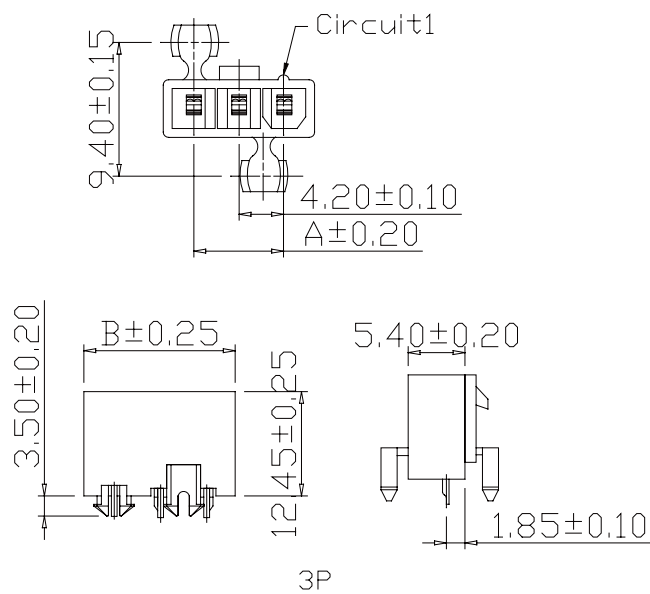

PartNo.: 4200S-1XXTW 1-L

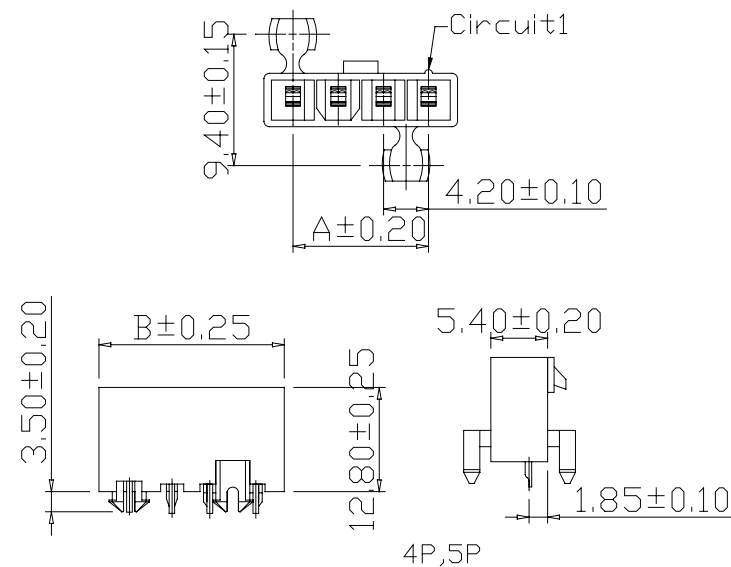

APPRO	CHECK	DRAWN	PART NO.	Part No.:4200S-1XXTW1-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	